
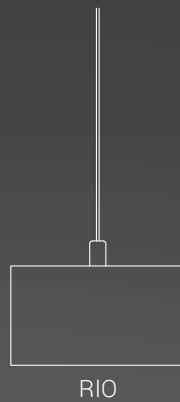







K-LiTE-PRO







ARCHITECTURAL

PROFILES


PENDANT		REVO	04		REVO DOT	10		REVO 600	12		NEO-D	40		RIO	46
---------	---	------	----	---	----------	----	--	----------	----	---	-------	----	---	-----	----

PENDANT		ARC-L	52		ARC-D	56		TRIO	58		DEEP	63		OVI	76
---------	---	-------	----	---	-------	----	--	------	----	---	------	----	---	-----	----

PENDANT		INFINITY	74		REVO DOT-H	22		REVO DOT-S	24		REVO DOT-R	26		REVO DOT-Y	28
---------	--	----------	----	--	------------	----	---	------------	----	--	------------	----	--	------------	----

RECESS		IVO	32		POWER WASH	66		LEVO	42		LEVO WIDE	44
--------	---	-----	----	---	------------	----	--	------	----	---	-----------	----

SURFACE		REVO	04		EVO	30		NEO	38		POWER GRAZE	68		XIO	81
---------	---	------	----	---	-----	----	--	-----	----	---	-------------	----	---	-----	----

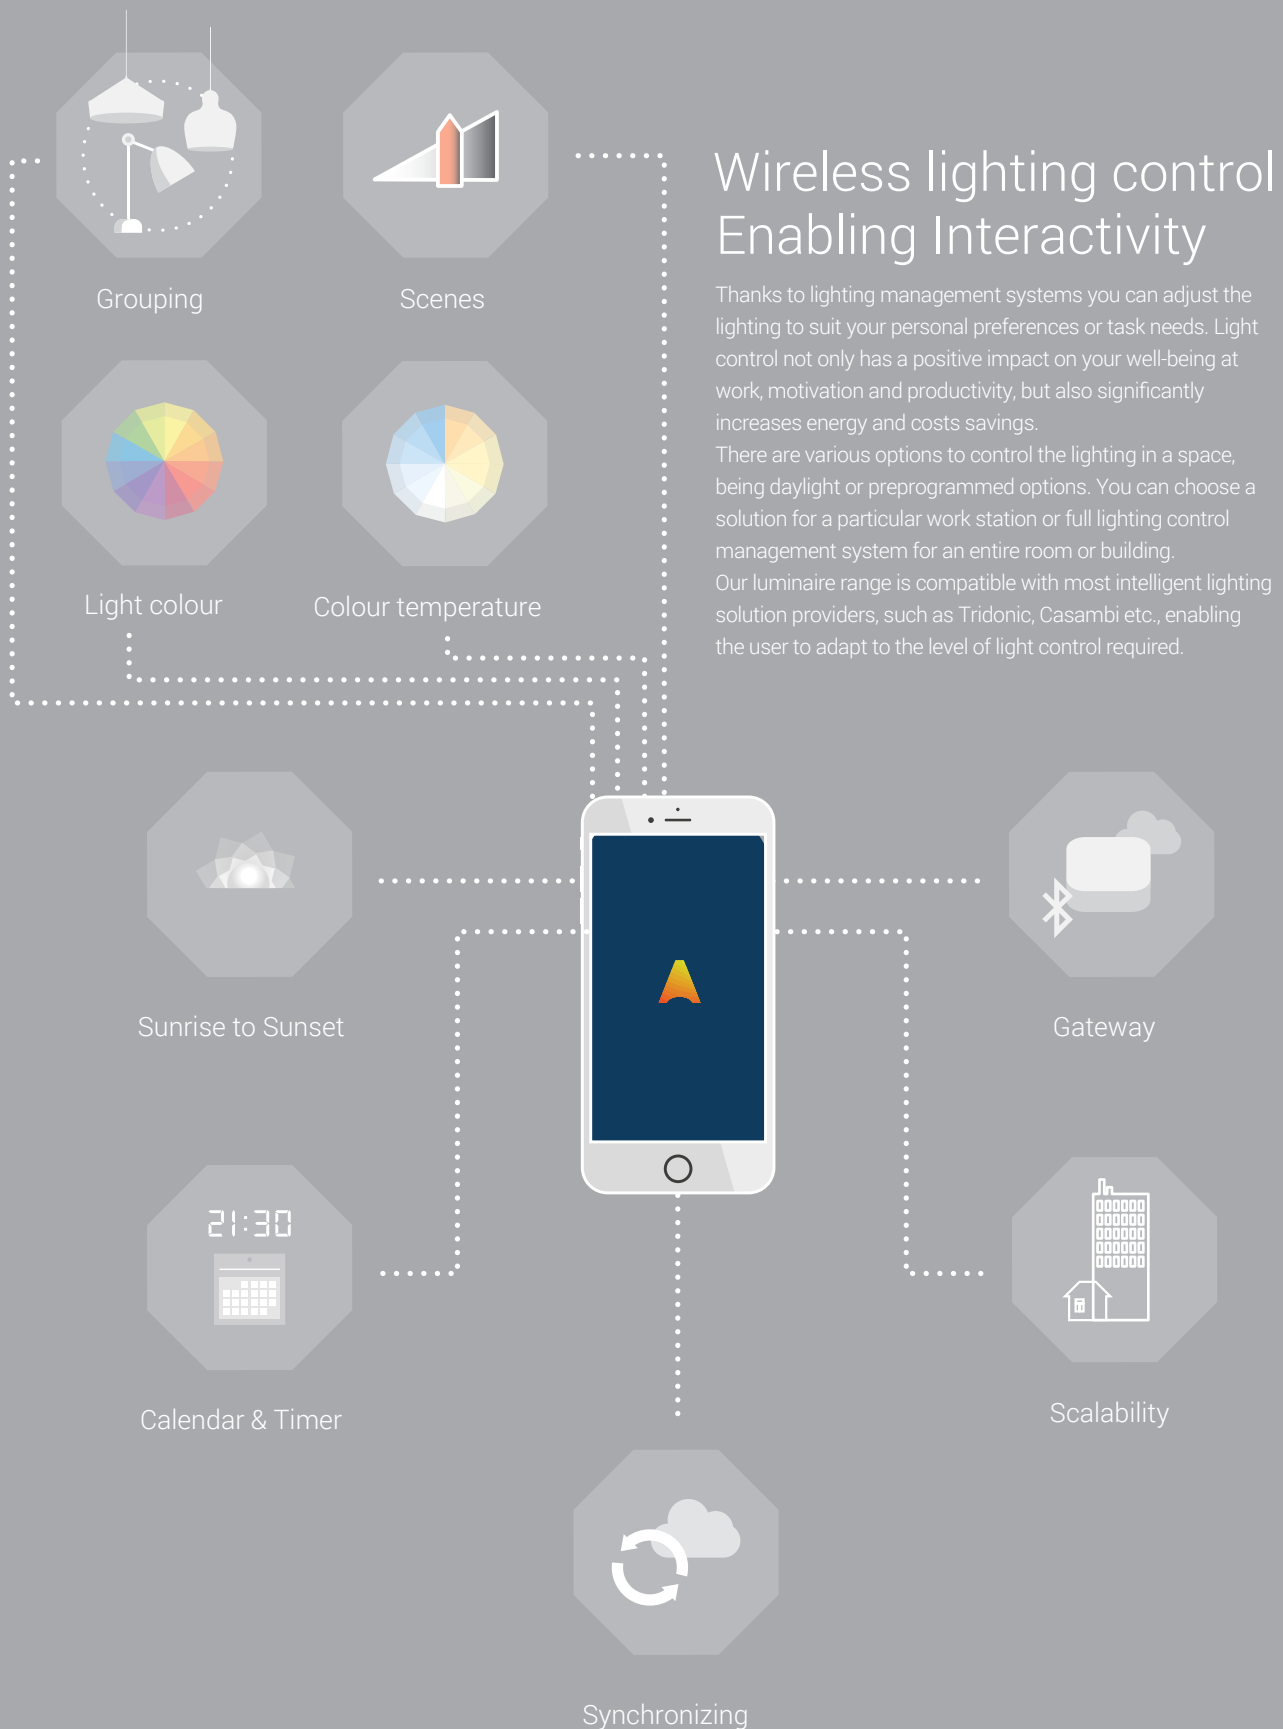



In pace with the latest technology

Ensuring that our luminaires fall within 3-steps MacAdams ellipse, we guarantee a barely visible colour difference between fixtures and production runs and a reliable colour consistency over time and among fixtures installed at different times on entire product range giving enormous advantage to user.

- L70 B10 @ 60,000h, Ta=25C
- SDCM ≤ 3
- 5-year Warranty

Tunable White

Replicate natural light and dark cycles inside homes and offices.

It has been proven that dynamic lighting not only has a positive impact on the human circadian biorhythm, health and sleeping quality, but also positively improves effectiveness and concentration at work places and institutions.

- CRI >80 (>90 on request)
- 2700K-5700K





REVO

Power : 30W / 40W	60W / 80W	90W
Length : 1188mm	2365mm	3540mm

Smart Pendant

REVO is a fresh new lighting solution when projecting the interior of an office or any commercial space. Its high-quality housing in powder coated finish makes it a bold and stylish luminaire, available with various optic solutions ; reflector (modular), opal, prismatic or asymmetric; and direct / indirect light distribution. Used as an individual profile or put together in continuous lines or shapes.



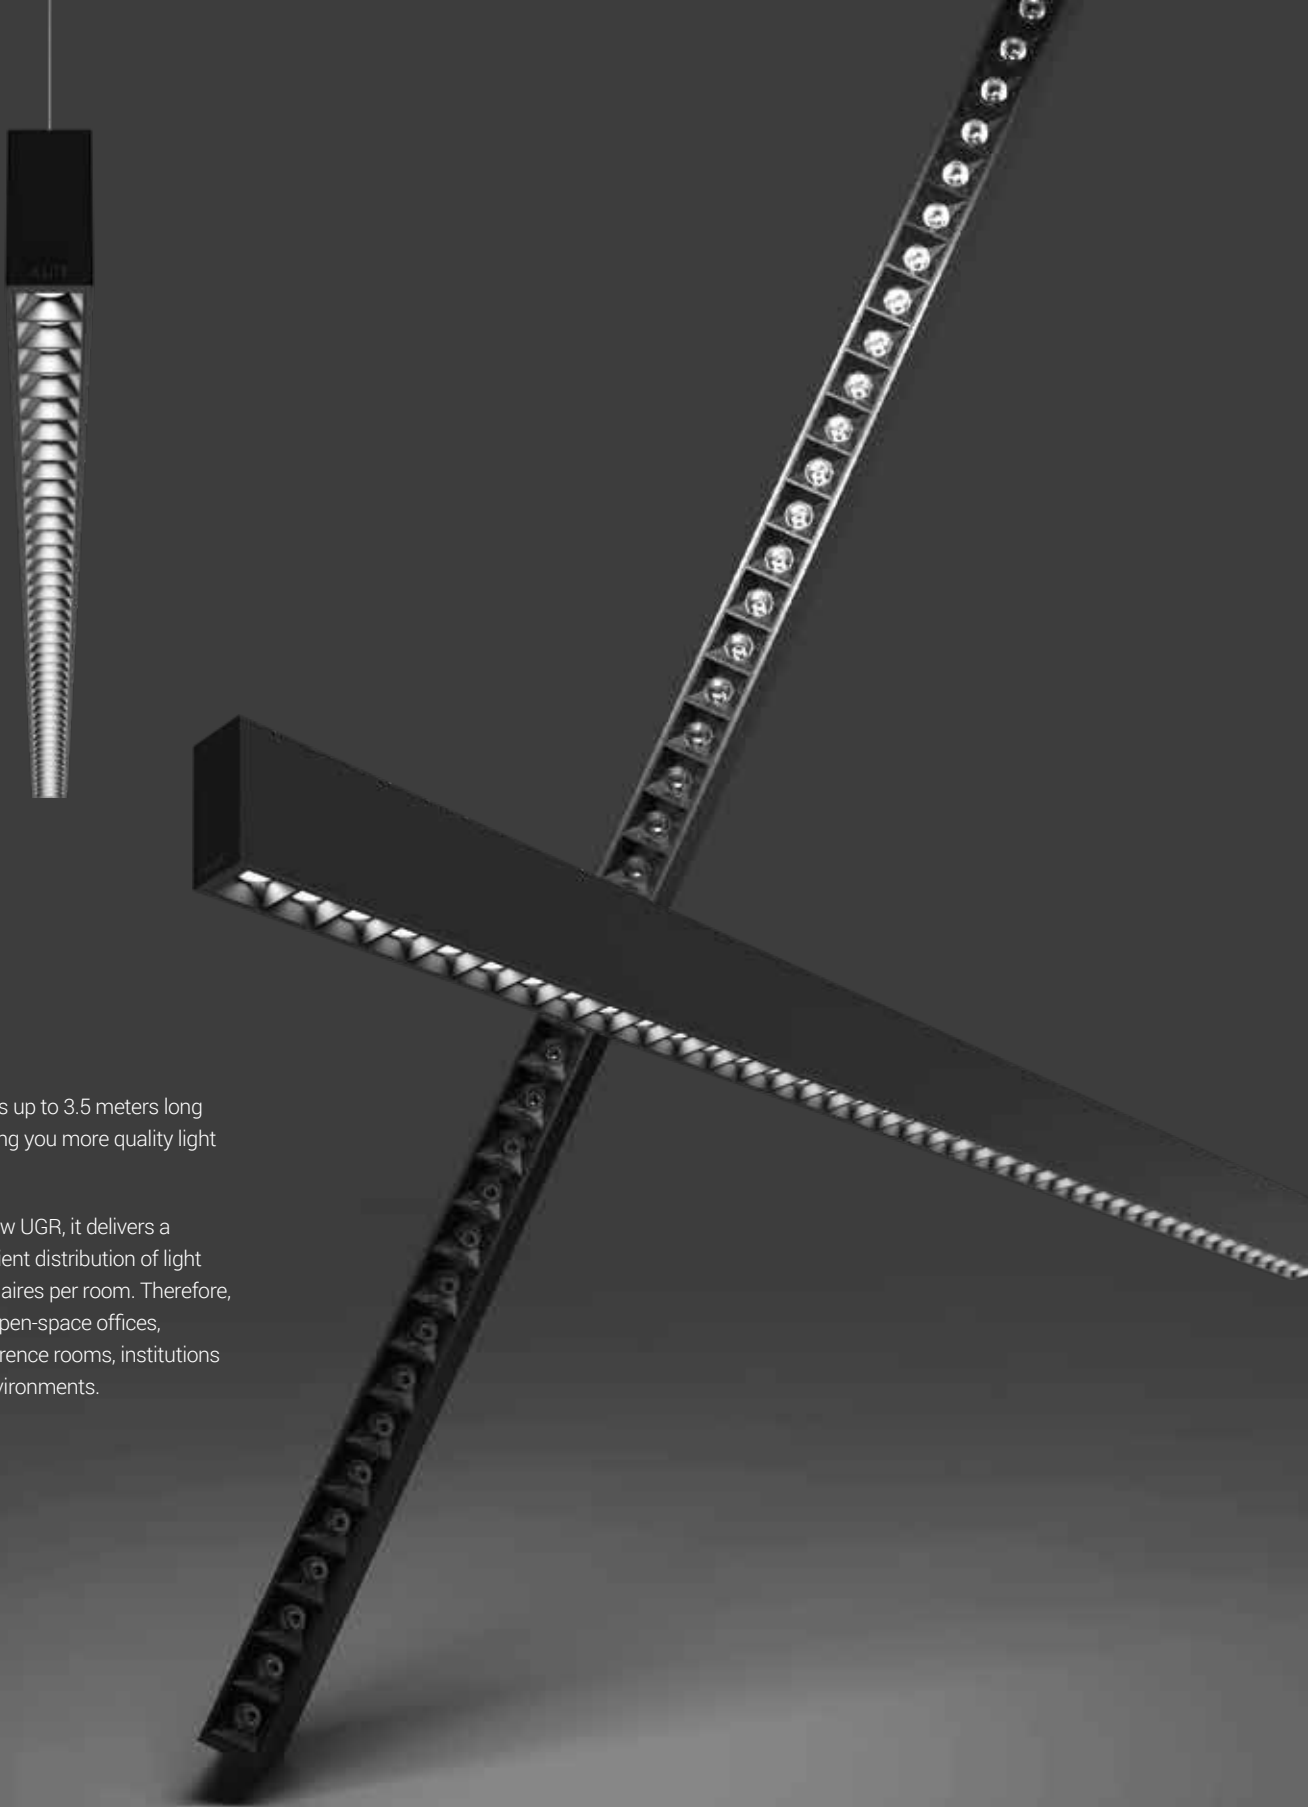


REVO

MINIMALIST

Revo impresses with its up to 3.5 meters long elegant housing, bringing you more quality light with cost-savings.

Due to its length and low UGR, it delivers a homogenous and efficient distribution of light that enables less luminaires per room. Therefore, it is most suitable for open-space offices, corridors, foyers, conference rooms, institutions and other spacious environments.

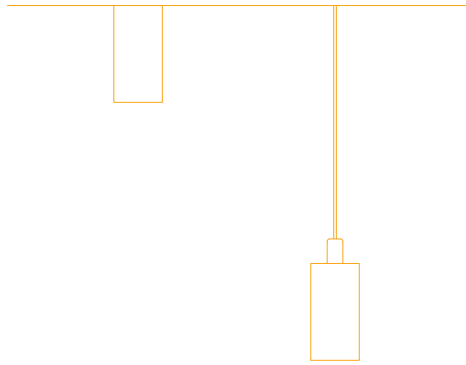

REVO

Flexible Design Multiple Applications

Revo luminaire is a versatile solution for projects that demand high quality of the lighting system and high visual comfort. With its modular design, the Revo can be used as an individual fixture or as a combination of luminaires put together in continuous lines.

K-LITE

REVO

Power : 30W / 40W 60W / 80W 90W
Length : 1188mm 2365mm 3540mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options


- Through wiring
- Dimmable options



Beam Angle



Accessories



Canopy Kit

For control unit
Bespoke Colour Options


SURFACE





PENDANT DIRECT



PENDANT DIRECT / INDIRECT




Dimension in mm

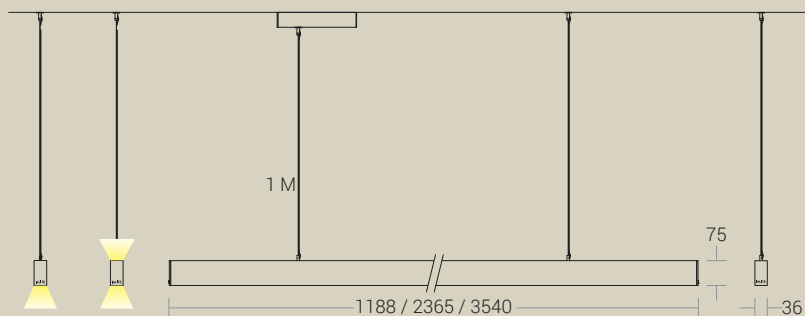


Housing Colour

- High-quality aluminium with powder coated finish in RAL9005 Black fine texture | RAL9016 White fine texture | RAL9006 Grey fine texture

Light Distribution

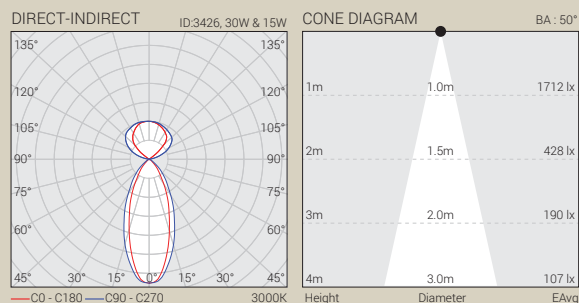

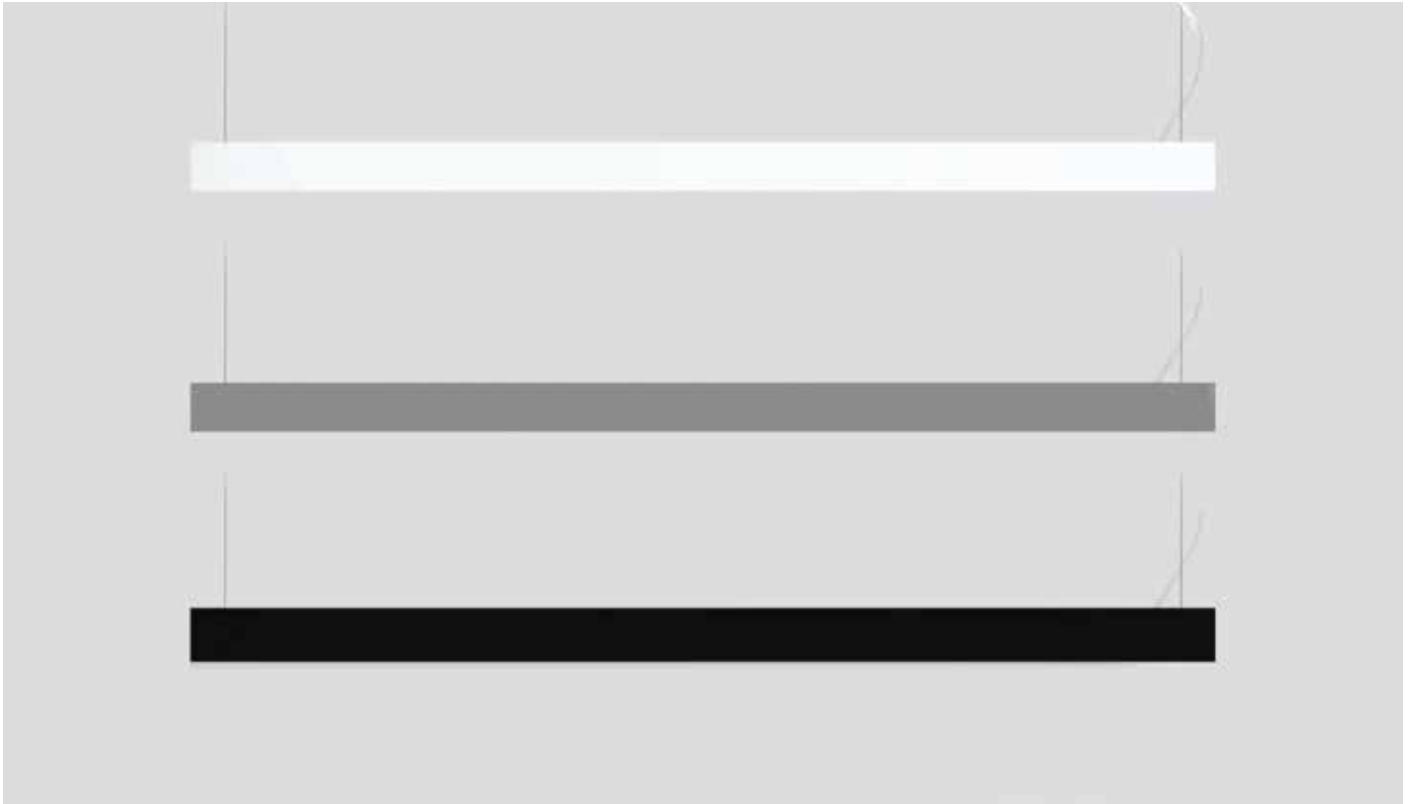

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 50°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Hexa-Cell (Matt Black)
UGR	: <16

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Surface / Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3464	30W	1188 x 36 x 75
3465	40W	1188 x 36 x 75
3466	60W	2365 x 36 x 75
3467	80W	2365 x 36 x 75
3468	90W	3540 x 36 x 75

Pendant - Direct & Indirect

ID	Wattage	Dimension (mm)
3426	30W & 15W	1188 x 36 x 75
3427	40W & 15W	1188 x 36 x 75
3446	60W & 30W	2365 x 36 x 75
3447	80W & 30W	2365 x 36 x 75
3448	90W & 40W	3540 x 36 x 75

Surface Mounted - Direct

ID	Wattage	Dimension (mm)
3442	30W	1188 x 36 x 75
3443	40W	1188 x 36 x 75
3444	60W	2365 x 36 x 75
3445	80W	2365 x 36 x 75

K-LITE

REVO DOT

Power : 16W 24W 48W 72W
Length : 600mm 1200mm 2400mm 3600mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M




Options

- Through wiring
- Dimmable options




L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle



Accessories




Canopy Kit

For control unit
Bespoke Colour Options


PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension
in mm

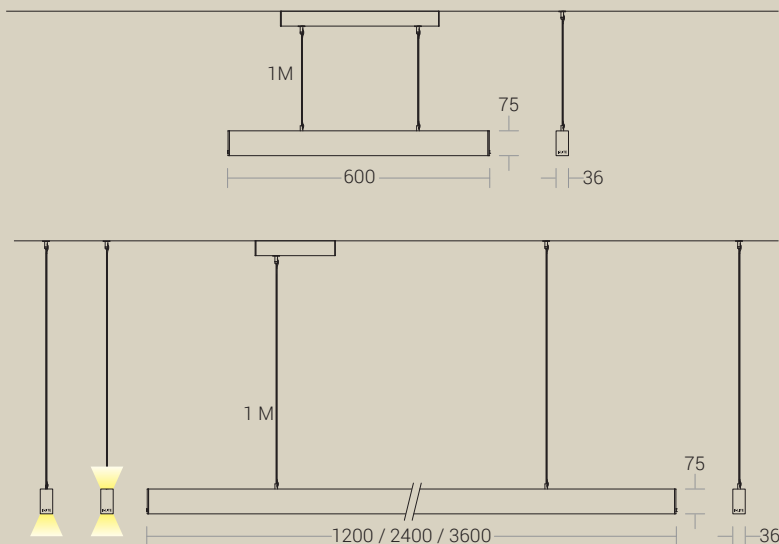


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution

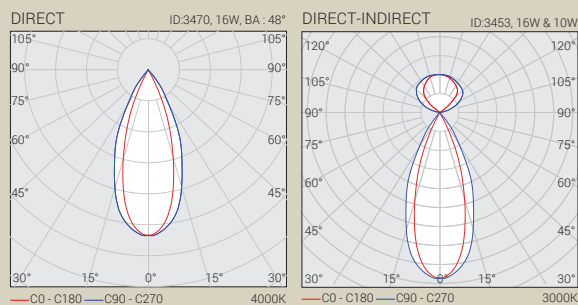



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Diffuser Finish	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Surface / Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3470	16W	600 x 36 x 75
3471	24W	1200 x 36 x 75
3472	48W	2400 x 36 x 75
3473	72W	3600 x 36 x 75



Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3453	16W & 10W	600 x 36 x 75
3454	24W & 10W	1200 x 36 x 75
3455	48W & 20W	2400 x 36 x 75
3456	72W & 20W	3600 x 36 x 75



K-LITE

REVO 600

Power : 25W
Length: 612mm

Upto
120
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L1: Matt Black, UGR <16

Beam Angle



50°

L2: Vaccum Metalized Chrome Finish, UGR <12

Beam Angle




34°



48°

Accessories




Canopy Kit

For control unit
Bespoke Colour Options

K-LITE 12


PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension
in mm

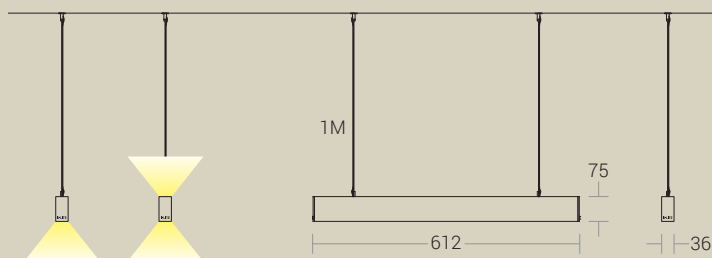


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution

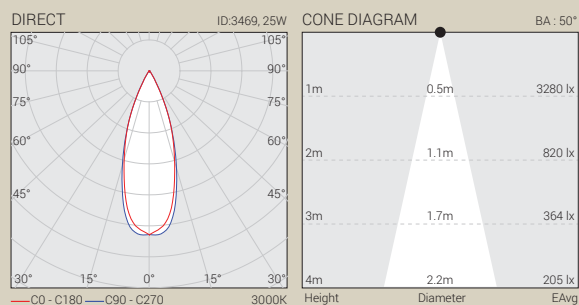

L1



L2



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 50° / 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Matt Black / Vacuum Metalized Chrome Finish
UGR	: L1 - <16 / L2 - <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Surface / Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Lens Option	Dimension (mm)
3469	25W	L1	572 x 36 x 75
3469	25W	L2	612 x 36 x 75

Pendant Direct : ID + L1

Penant Direct-Indirect : ID + L1

Pendant - Direct-Indirect

ID	Wattage	Lens Option	Dimension (mm)
3452	25W & 10W	L1	572 x 36 x 75
3452	25W & 10W	L2	612 x 36 x 75





SHAPES


Square, Rectangular
& Hexagonal continuous
light-lines to create unique
lighting applications

Separate units can be connected together in continuous light-lines. Complete junction corners, available in a range of degree angles to form different shapes (-, +, T, V, Y, L) and customized lines to adapt the lighting to the space.







Customized Solutions




L




+




LINEAR




RECTANGULAR




S




T



Z





V




Y

Various composition can be created via Revo connect.
Suspension accessories to be ordered separately.




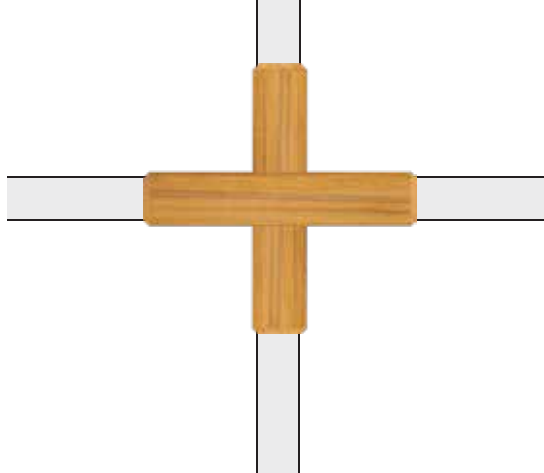
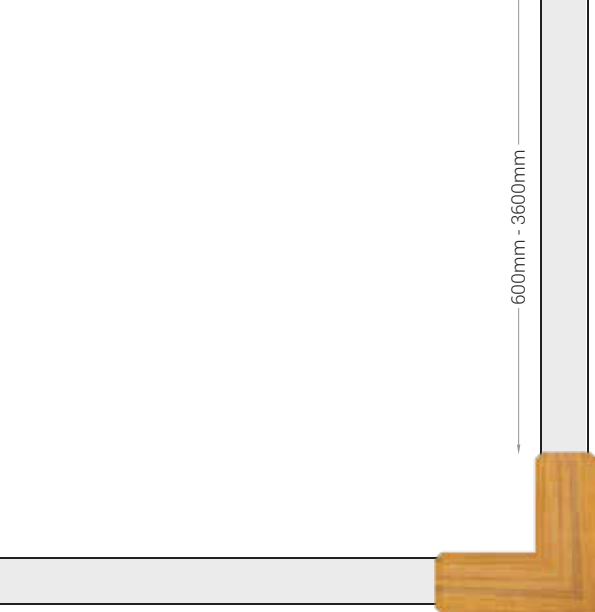



Configure continuous
light-lines and create unique
Lighting Applications

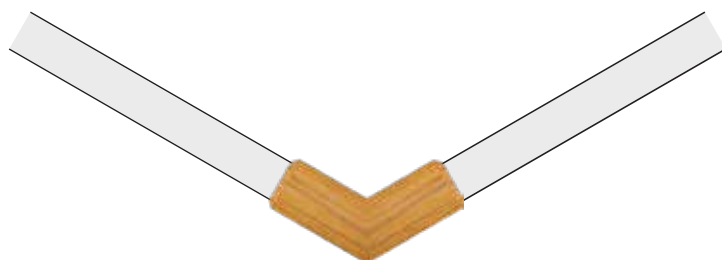


Teak Wood
Pine Wood
Bespoke
custom finish

Where colours can be
matched with the interiors

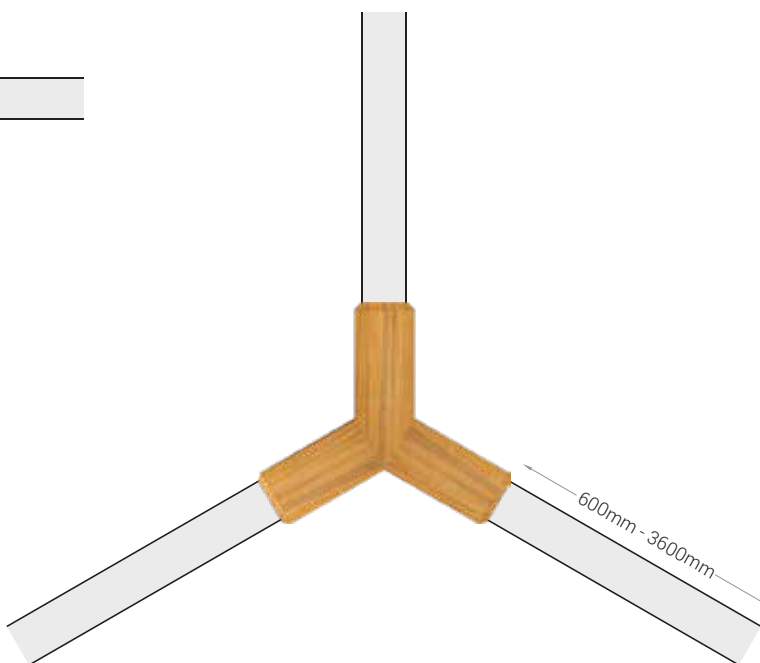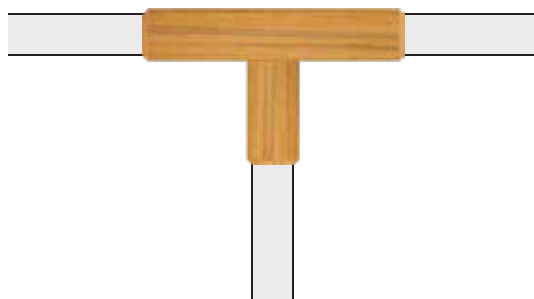

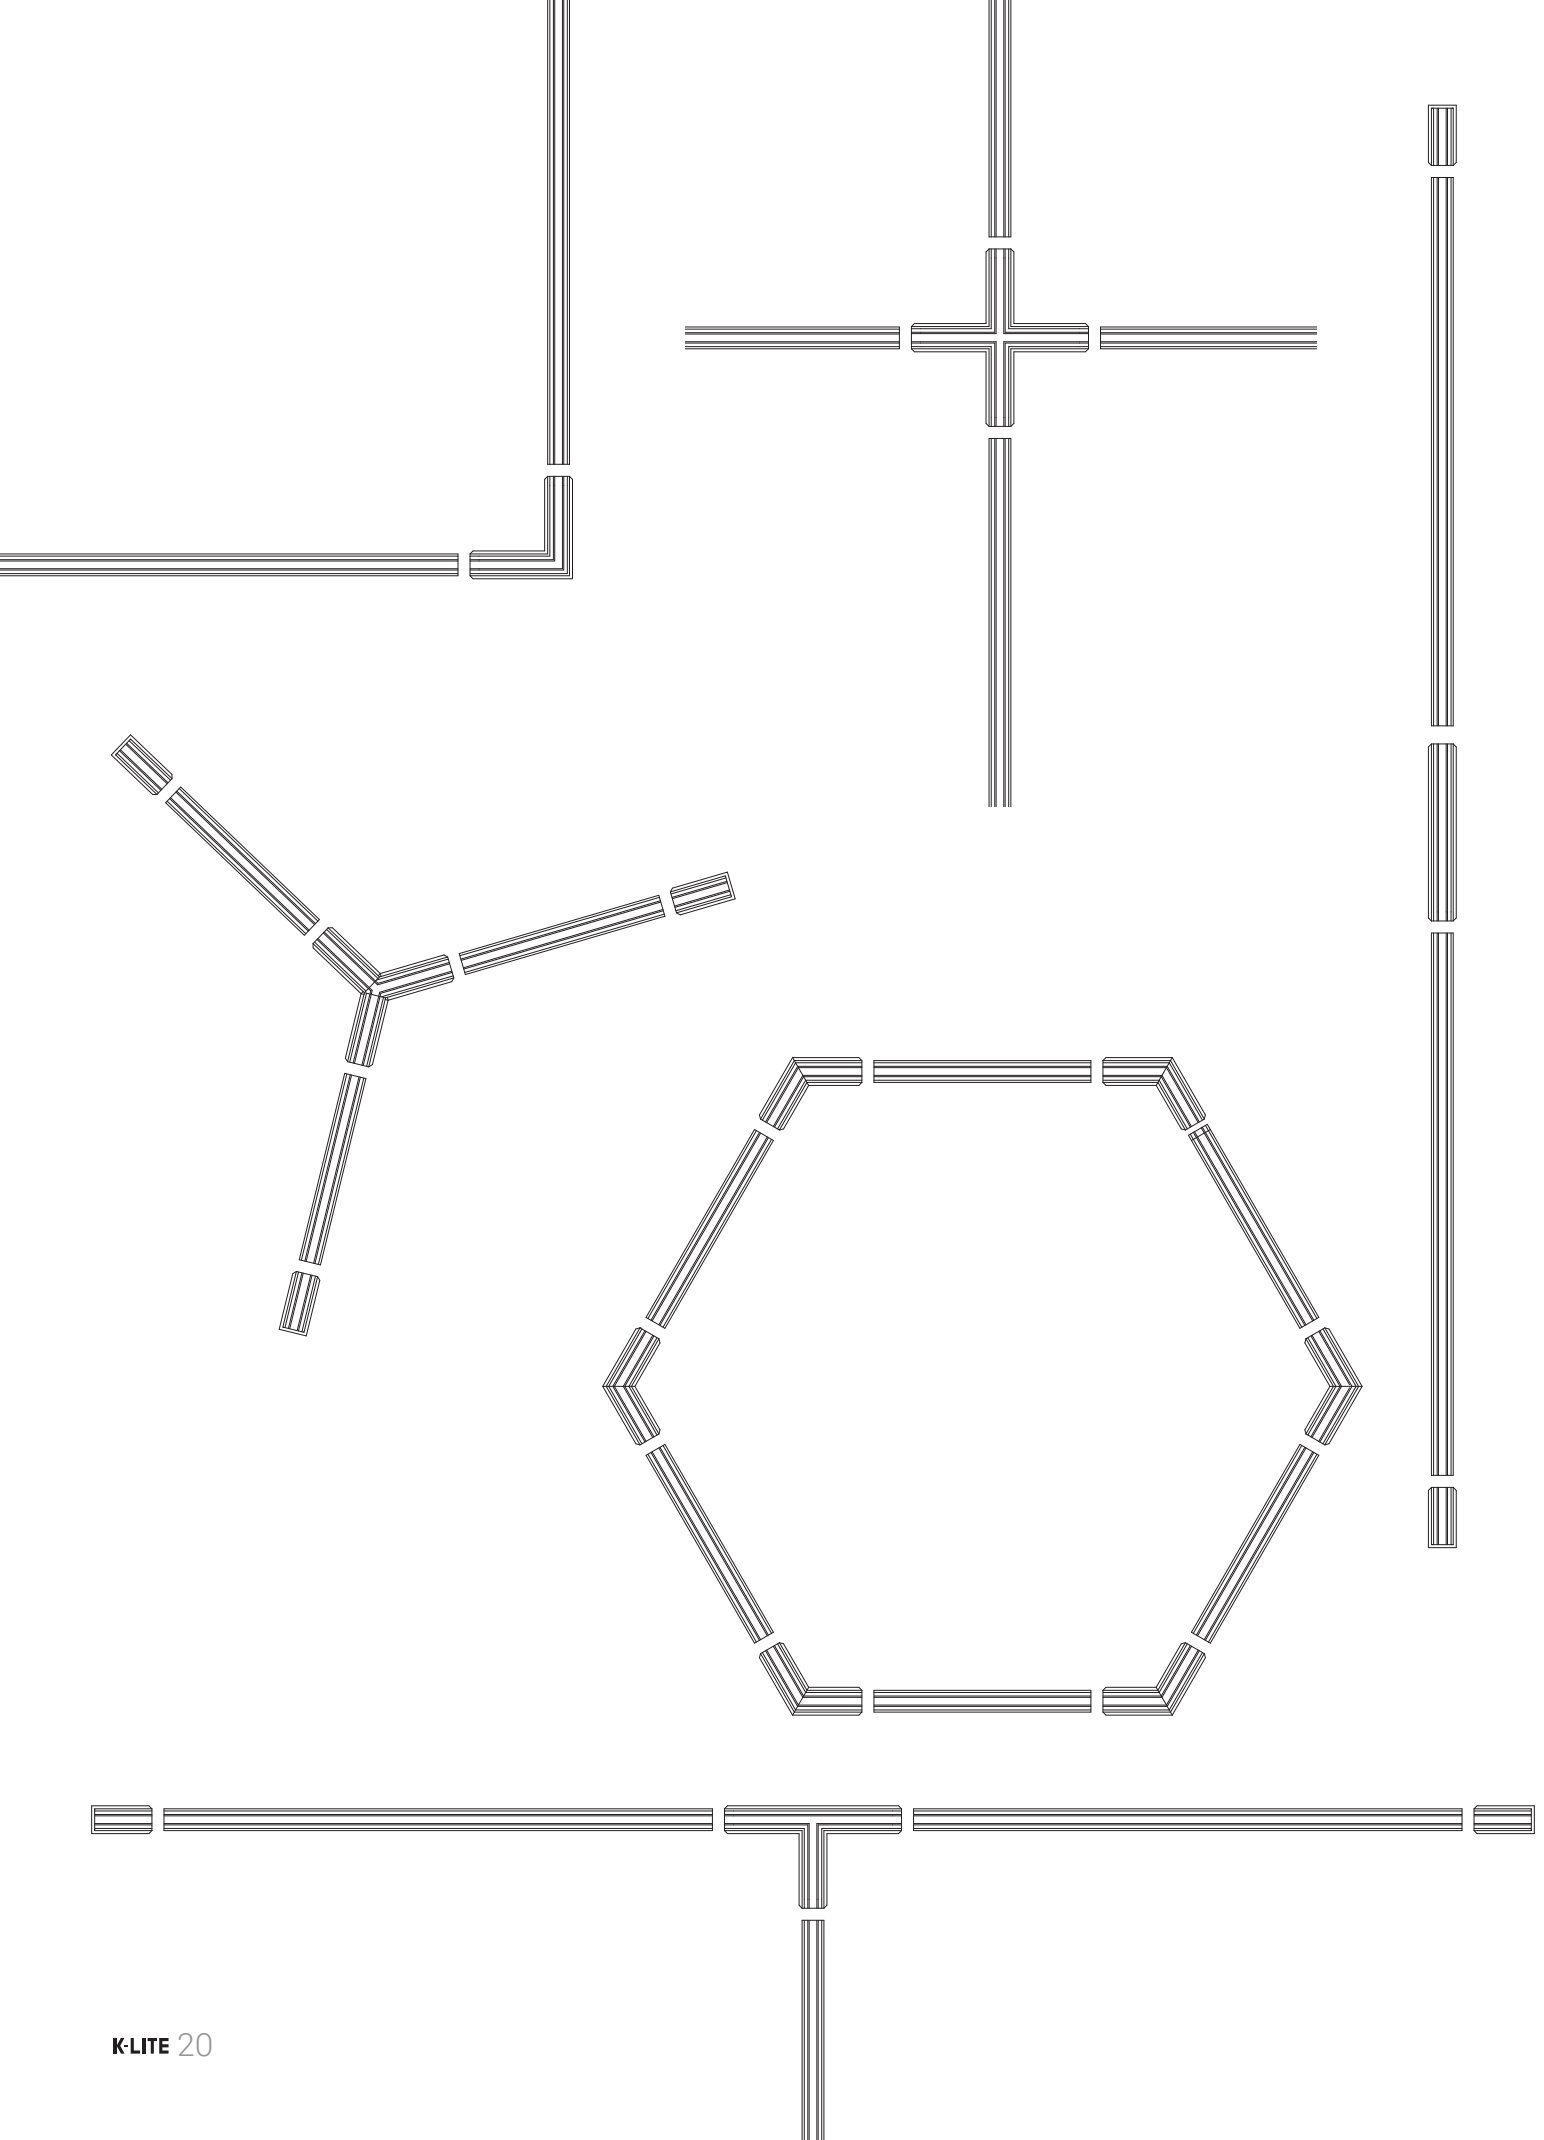

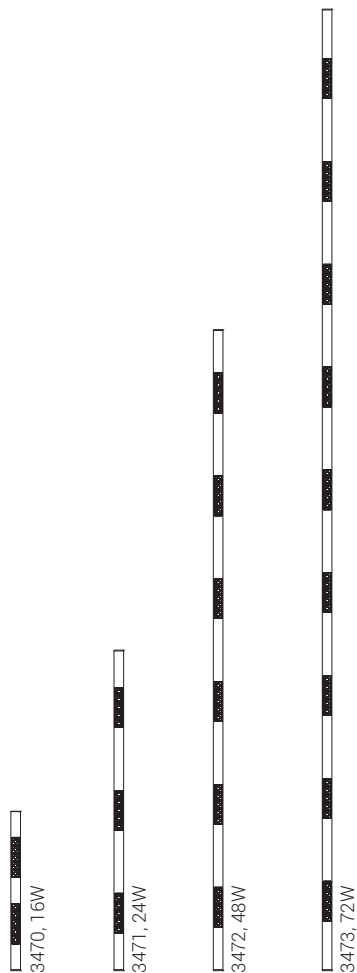

Ordering Guide


ID	Connector
8311	L Connector
8312	V Connector
8313	Y Connector
8314	T Connector
8315	+ Connector
8316	- Connector

Revo ID + Connector ID




Dimension _____
in mm


ID : 8311 L Connector

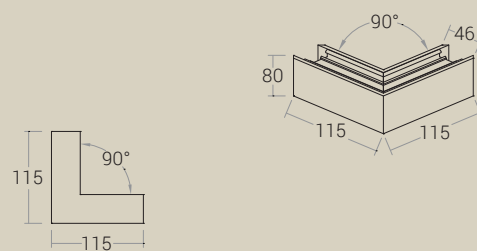


ID : 8312 V Connector

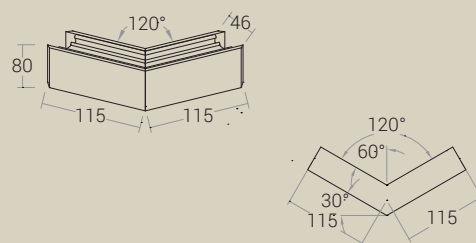


ID : 8314 T Connector

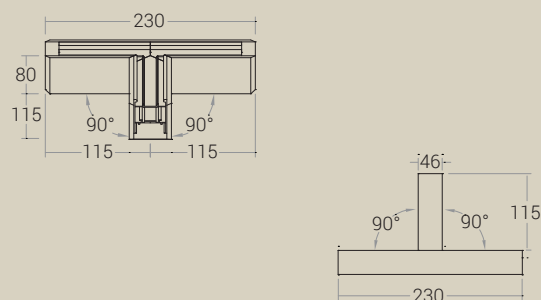

ID : 8313 Y Connector

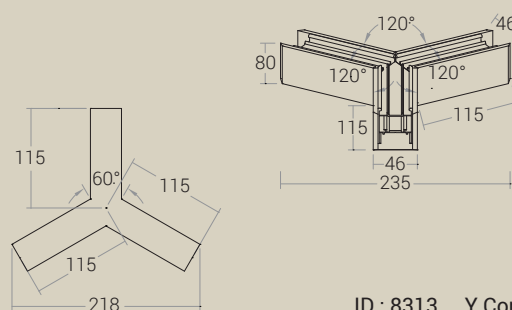

ID : 8315 + Connector

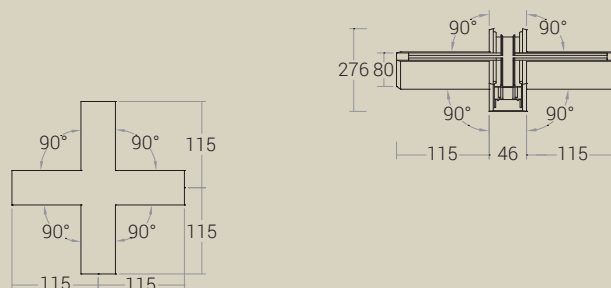

REVO DOT-H

Power : 48W 96W 60W 120W
Length : Ø865mm Ø1455mm Ø865mm Ø1455mm

Upto
120
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L2: Vaccum Metalized Chrome Finish, UGR <12

Beam Angle




34°



48°



Accessories



Canopy Kit

For control unit
Bespoke Colour Options





PENDANT - LENS



PENDANT - DIFFUSER



Dimension
in mm

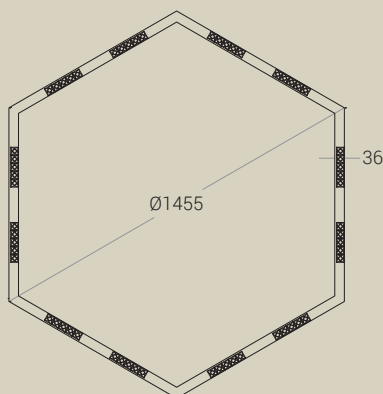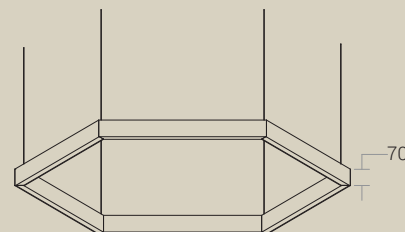

Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



L2



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Lens

ID	Wattage	Dimension (mm)
3501	48W	Ø865 x 36 x 76
3502	96W	Ø1455 x 36 x 76

Pendant - Diffuser

ID	Wattage	Dimension (mm)
3503	60W	Ø865 x 50 x 70
3504	120W	Ø1455 x 50 x 70

REVO DOT-S

Power : 64W 96W 80W 160W
Length : □719mm □1316mm □719mm □1316mm

Upto
120
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L2: Vaccum Metalized Chrome Finish, UGR <12

Beam Angle




34°



48°



Accessories




Canopy Kit

For control unit
Bespoke Colour Options





PENDANT - LENS



PENDANT - DIFFUSER

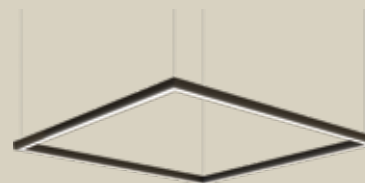

Dimension
in mm

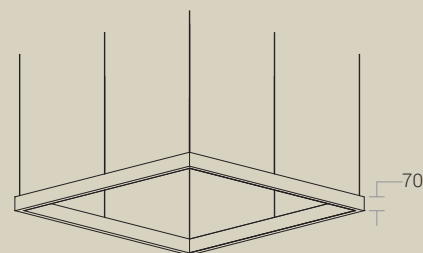

Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



L2



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Lens

ID	Wattage	Dimension (mm)
3505	64W	□719 x 36 x 76
3506	96W	□1316 x 36 x 76

Pendant - Diffuser

ID	Wattage	Dimension (mm)
3507	80W	□719 x 50 x 70
3508	160W	□1316 x 50 x 70

K-LITE

REVO DOT-R

Power : 80W 120W
Length : 719 x 1316mm 719 x 1316mm

Upto
120
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle




34°



48°



Accessories



Canopy Kit

For control unit
Bespoke Colour Options





PENDANT - LENS



PENDANT - DIFFUSER



Dimension
in mm

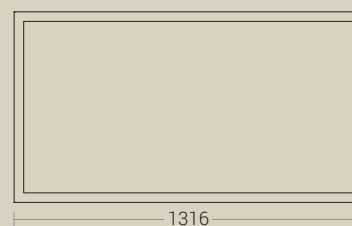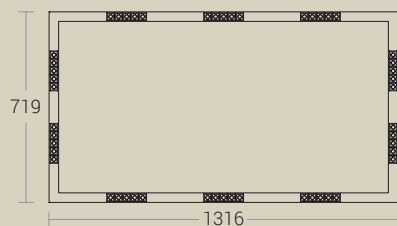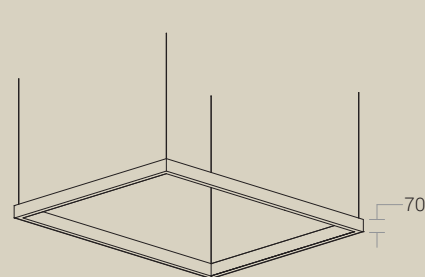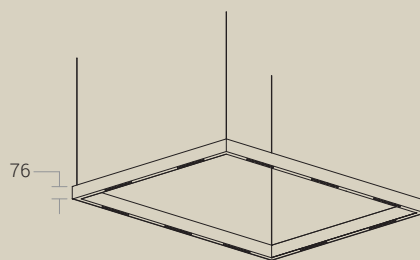

Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



L2



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Lens

ID	Wattage	Dimension (mm)
3509	80W	719 x 1316 x 76

Pendant - Diffuser

ID	Wattage	Dimension (mm)
3510	120W	719 x 1316 x 70

K-LITE

REVO DOT-Y

Power : 24W 48W 30W 60W
Length : Ø744mm Ø1332mm Ø744mm Ø1332mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M




Options

- Through wiring
- Dimmable options



L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle




34° 48°





PENDANT - LENS



PENDANT - DIFFUSER



Dimension
in mm

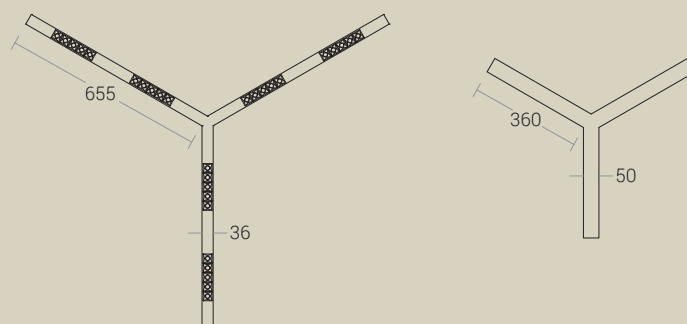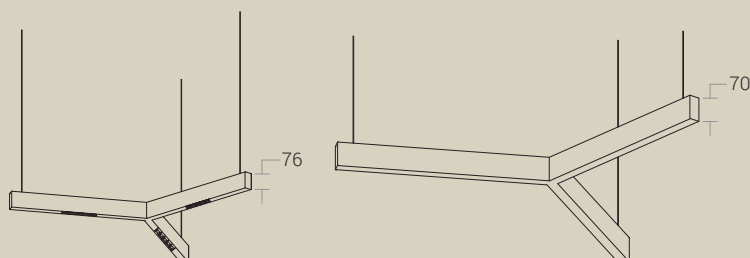

Housing Colour




High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



L2

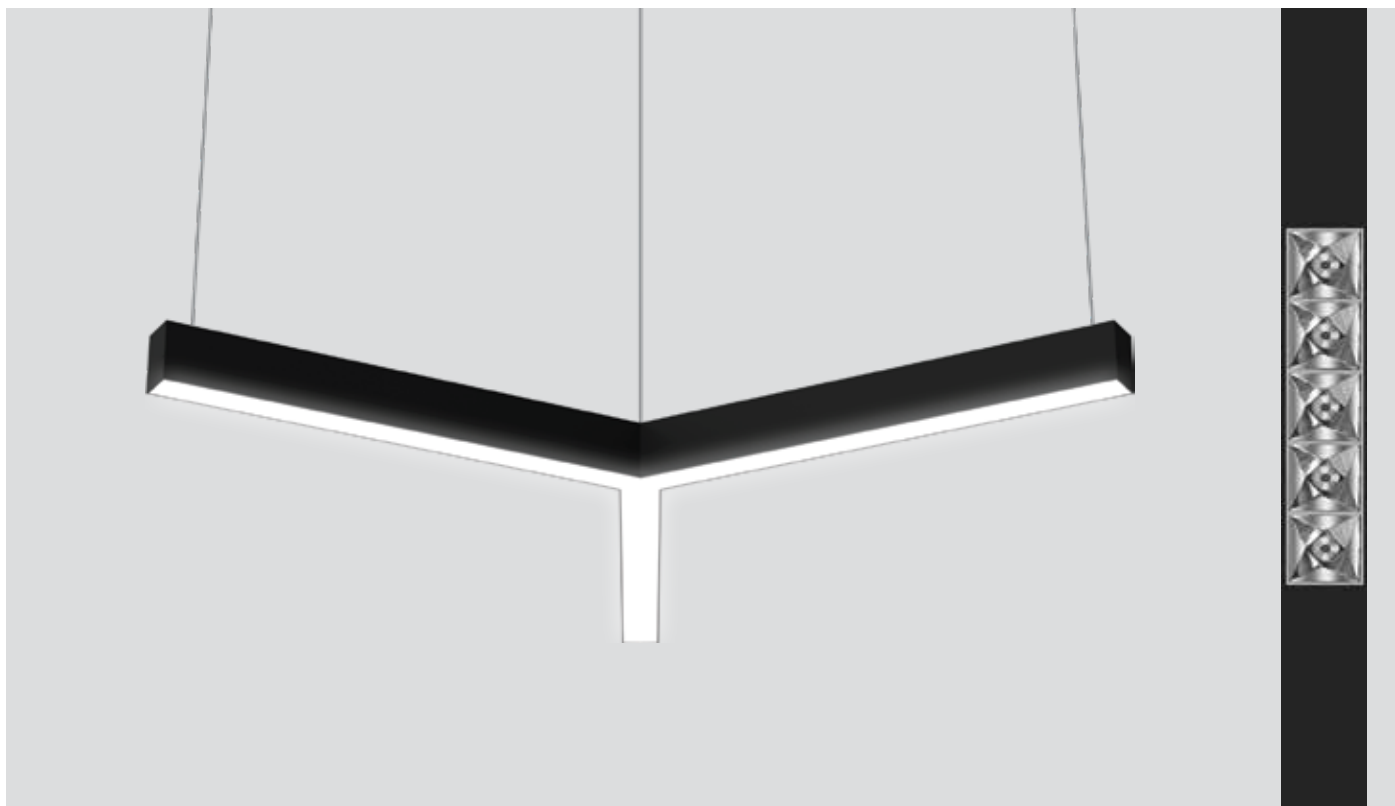

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium with Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Lens

ID	Wattage	Dimension (mm)
3511	24W	Ø744 x 36 x 76
3512	48W	Ø1332 x 36 x 76

Pendant - Diffuser

ID	Wattage	Dimension (mm)
3513	30W	Ø744 x 50 x 70
3514	60W	Ø1332 x 50 x 70

K-LITE

EVO

Power : 10W 20W 30W 40W
Length : 162mm 312mm 462mm 612mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs




Options

- Through wiring
- Dimmable options




L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle




K-LITE 30

SURFACE MOUNTED



Dimension
in mm

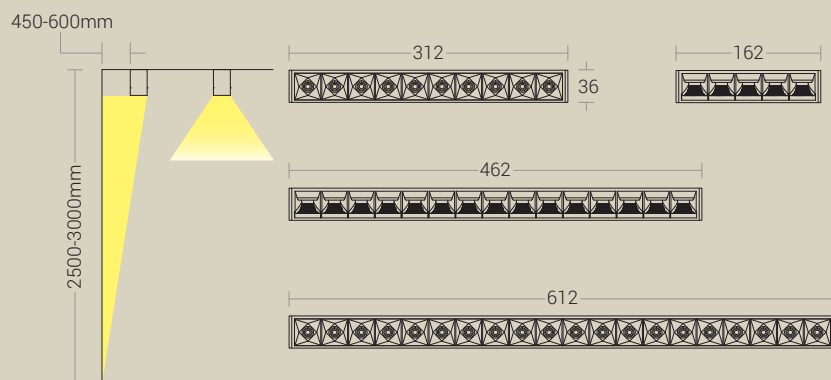


Housing Colour




High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture


Light
Distribution

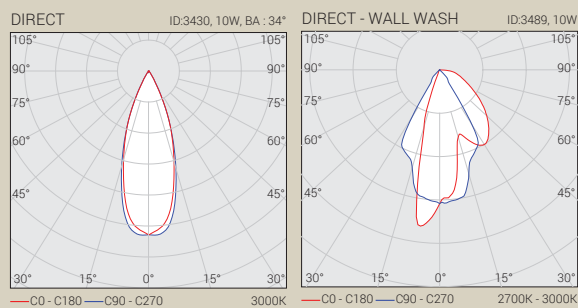

L2 - Direct



L2 - Wall Wash

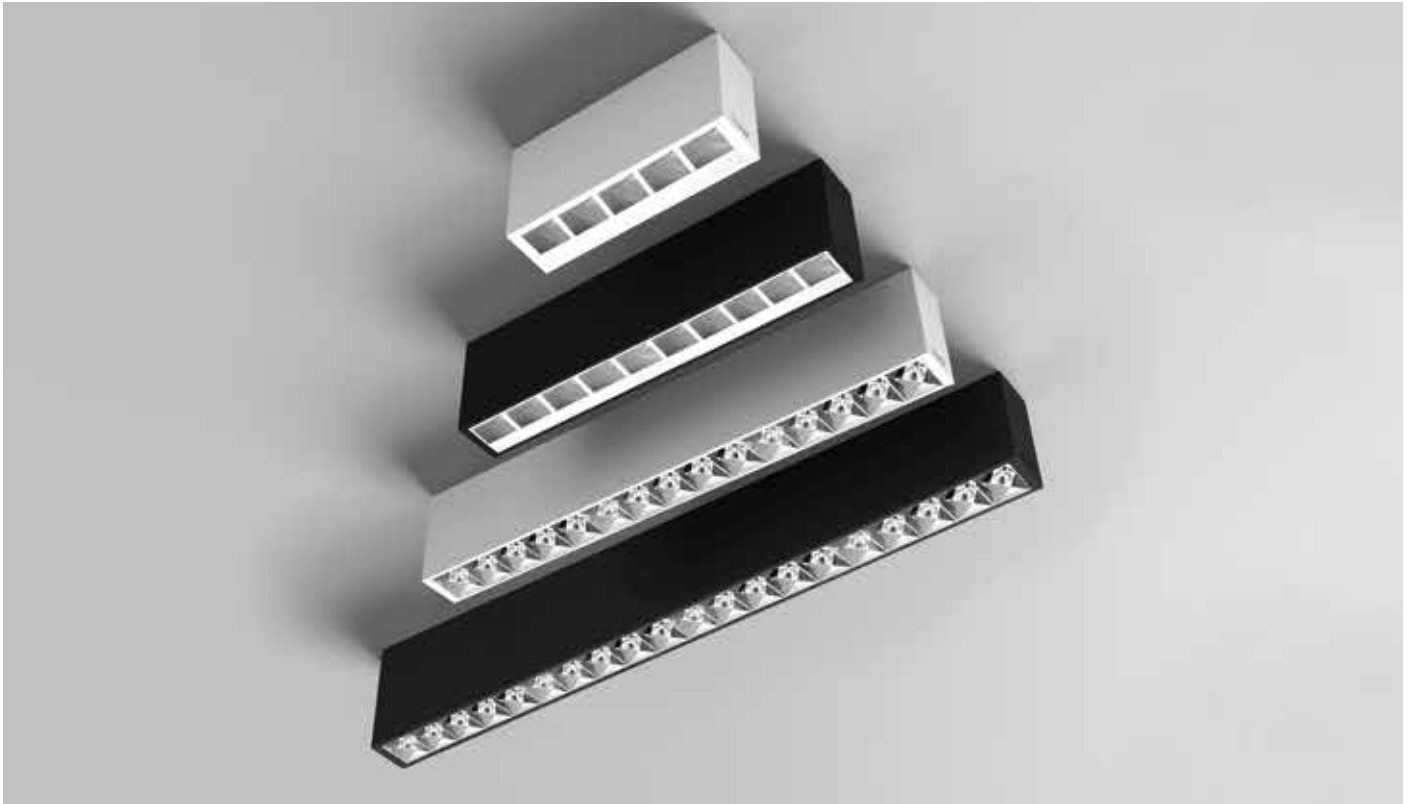

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 12°, 20°, 34°, 48°, Wall Wash
Diffuser/Lens Material	: Polycarbonate
Diffuser Finish	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting Finish	: Surface Mounted : White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 2 - 3KV
Efficiency	: >85%



Ordering Guide


Surface Mounted - Direct

ID	Wattage	Dimension (mm)
3430	10W	162 x 36 x 75
3431	20W	312 x 36 x 75
3432	30W	462 x 36 x 75
3457	40W	612 x 36 x 75

Surface Mounted - Wall Wash

ID	Wattage	Dimension (mm)
3489	10W	162 x 36 x 75
3490	20W	312 x 36 x 75
3491	30W	462 x 36 x 75
3492	40W	612 x 36 x 75

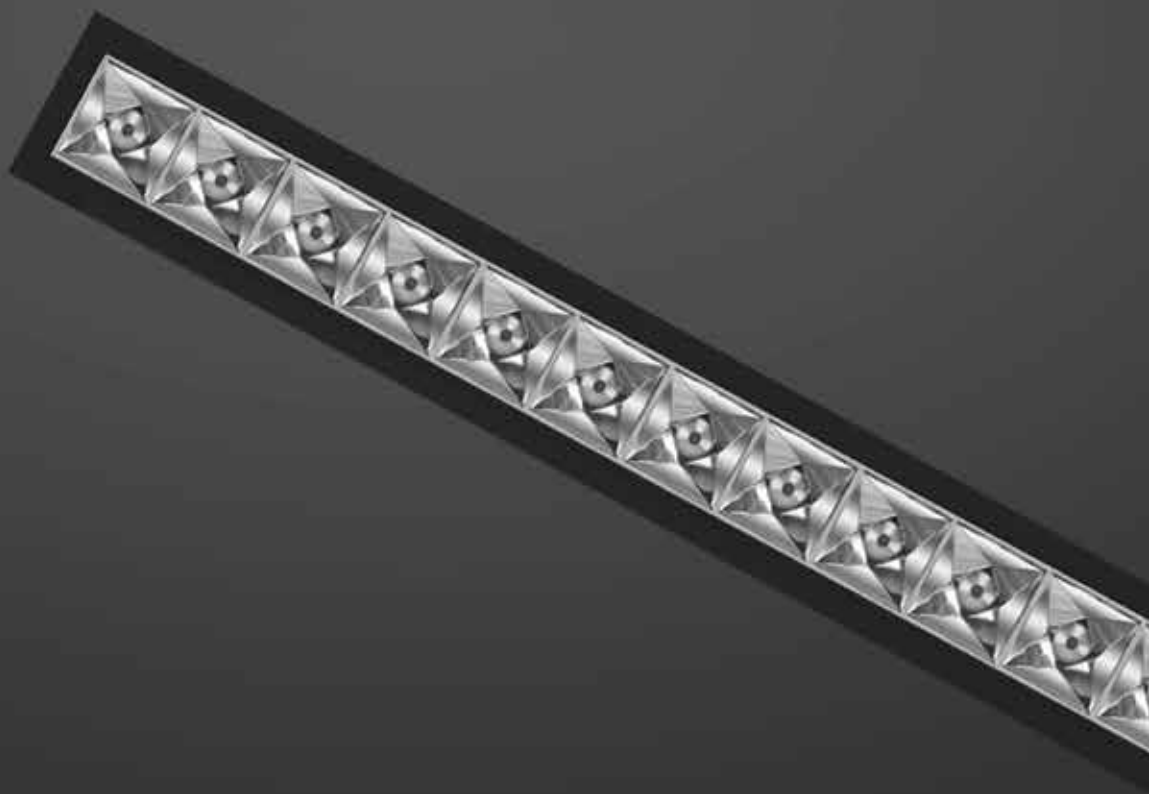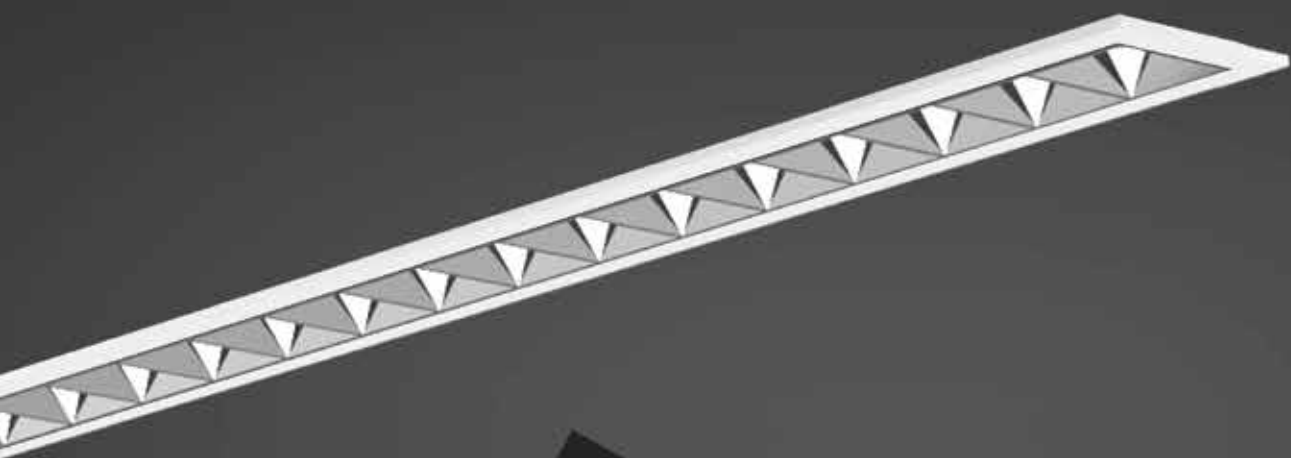

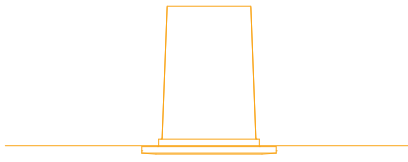

IVO

Silhouette of the Elegant Shape

Ivo impresses with its up to 1200 mm long elegant housing, bringing you more quality light and cost-savings.

Due to its length and low UGR, it delivers a homogenous and efficient distribution of light. Therefore, it is most suitable for high-end office, supermarkets, conference rooms, office buildings and other spacious environments.

K-LITE

IVO

Power : 35W 45W
Length : 602mm 1202mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs




Options

- Through wiring
- Dimmable options




L2: Vaccum Metalized Chrome Finish, UGR <12

Beam Angle




34° 48° 60° Wall Wash

RECESS

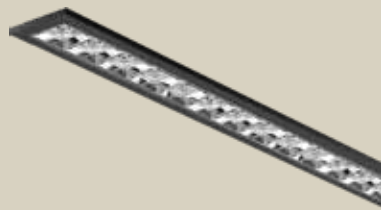

Dimension
in mm

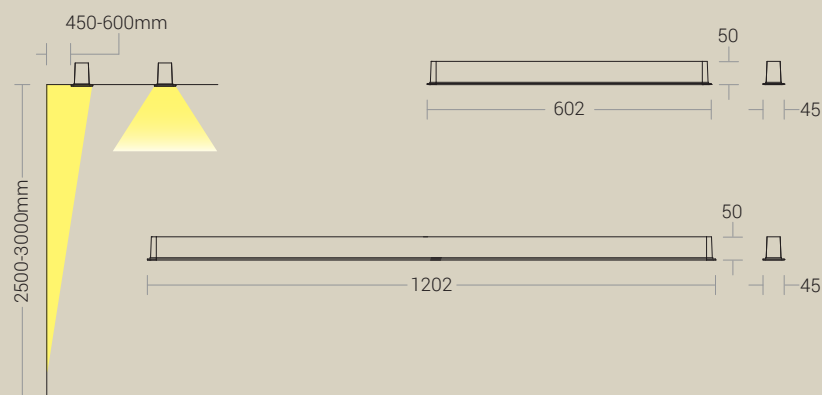


Housing Colour




High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution

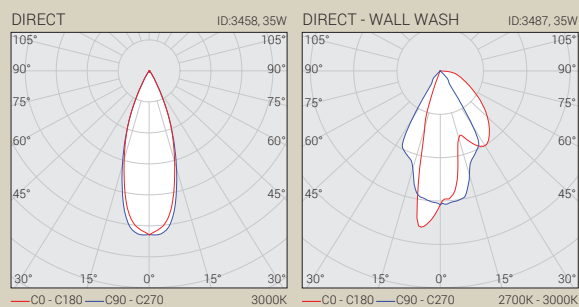

L2 - Direct



L2 - Wall Wash



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°, 60°, Wall Wash
Diffuser/Lens Material	: Polycarbonate
Diffuser Finish	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Recessed
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Recess - Direct

ID	Wattage	Dimension (mm)
3458	35W	602 x 45 x 50
3459	45W	1202 x 45 x 50

Recess - Wall Wash



ID	Wattage	Dimension (mm)
3487	35W	602 x 45 x 50
3488	45W	1202 x 45 x 50



ID : 3369 3W LED






40 x 40



ID : 3379 6W LED





100 x 40



ID : 3370 10W LED






70 x 70



ID : 3371 12W LED





160 x 40



ID : 3372 18W LED





100 x 100




ID : 3373 24W LED



310 x 40



Beam



L7 / B10
@ 60,000 Hrs

SDCM ≤ 3



Integrated
100-277V 50-60Hz



LINE 'N' DOT - LINEAR WALL WASHER




ID : 3374 3W LED



40 x 40







ID : 3380 6W LED



ID : 3381 6W LED






100 x 40



ID : 3375 10W LED






70 x 70



ID : 3376 12W LED






160 x 40



ID : 3377 18W LED







100 x 100



ID : 3378 24W LED



310 x 40



K-LITE

NEO

Power : 30W 60W
Length: 1180mm 2356mm

Upto
100
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs



198-264V 50Hz

Options

- Through wiring
- Dimmable options




Beam Angle



30°


Application Idea



SURFACE MOUNTED



Dimension
in mm




Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



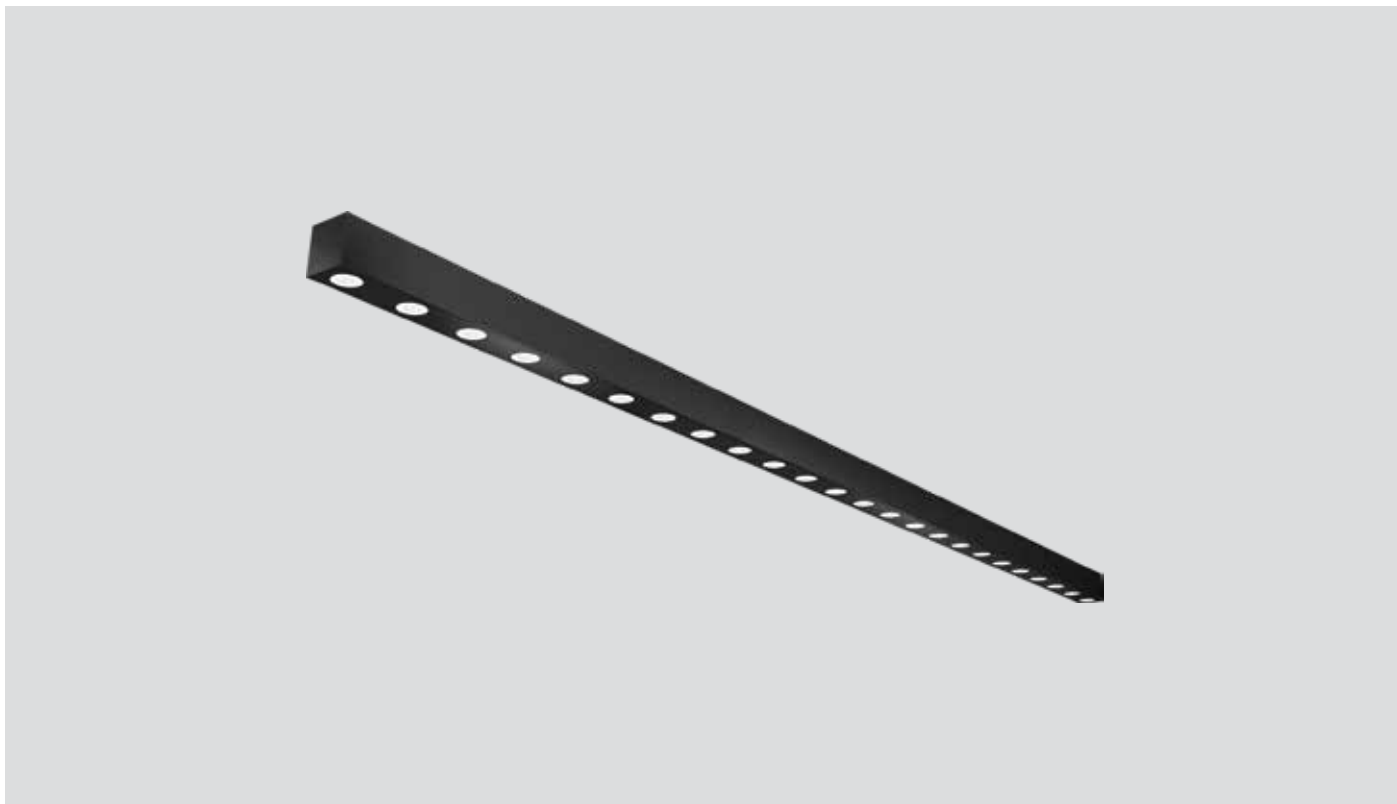

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 30°
Diffuser/Lens Material	: Polycarbonate
UGR	: <16

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Surface Mounted
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Non Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Surface - Direct

ID	Direct	Dimension (mm)
3422	30W	1180 x 25 x 27
3460	60W	2356 x 25 x 27

K-LITE

NEO-D

Power : 30W 60W
Length: 1180mm 2356mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- Through wiring
- Dimmable options




Beam Angle



100°
Diffused


Accessories




Canopy Kit

For control unit
Bespoke Colour Options

PENDANT
DIRECT

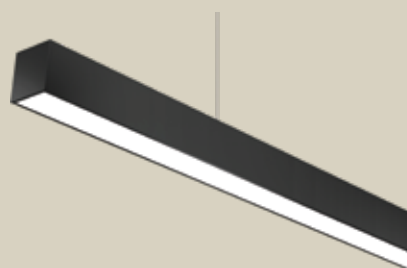

Dimension
in mm

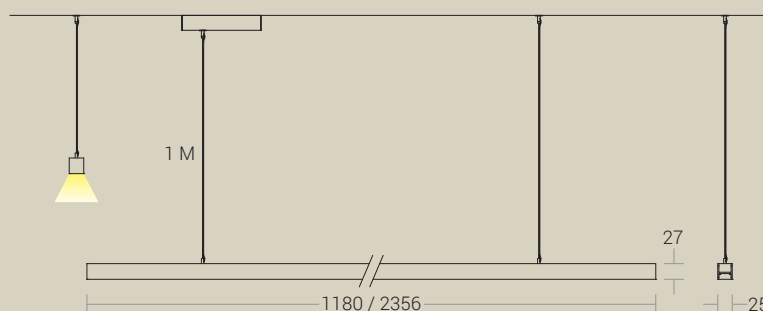


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online

Super slim - 25mm

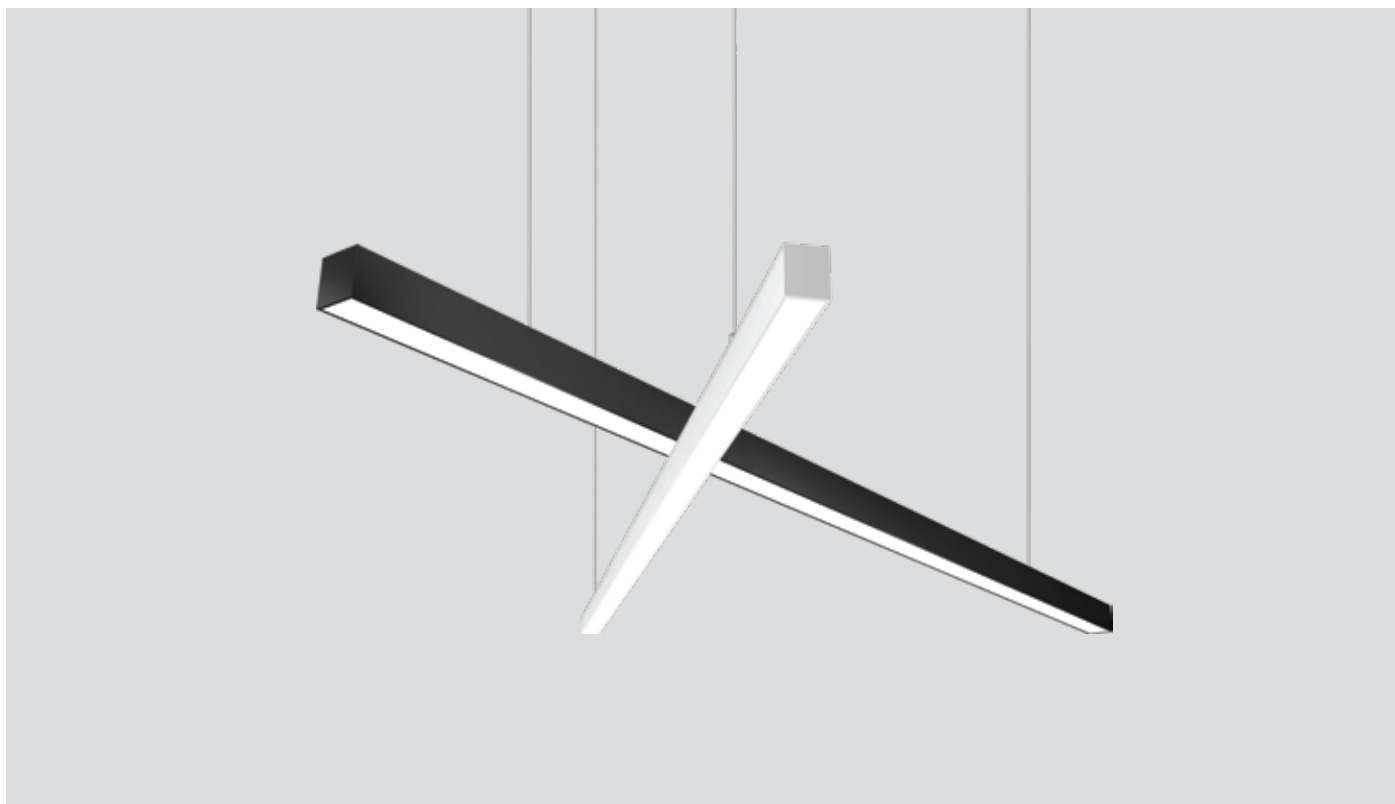

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 100°
Diffuser Material	: Polycarbonate
Diffuser Finish	: Opal
UGR	: <16

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Non Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Direct	Dimension (mm)
3497	30W	1180 x 25 x 27
3498	60W	2356 x 25 x 27

K-LITE

LEVO

Power : 30W / 40W 60W
Length : 1200 mm 2400 mm

Upto
100
lm/w

Features

- LUMILED / NICHIA
- 3000K / 4000K / 6000K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 50,000 Hrs



Options

- Through wiring
- Dimmable options



Beam Angle




115°
Diffused



RECESSED



Dimension
in mm




Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online

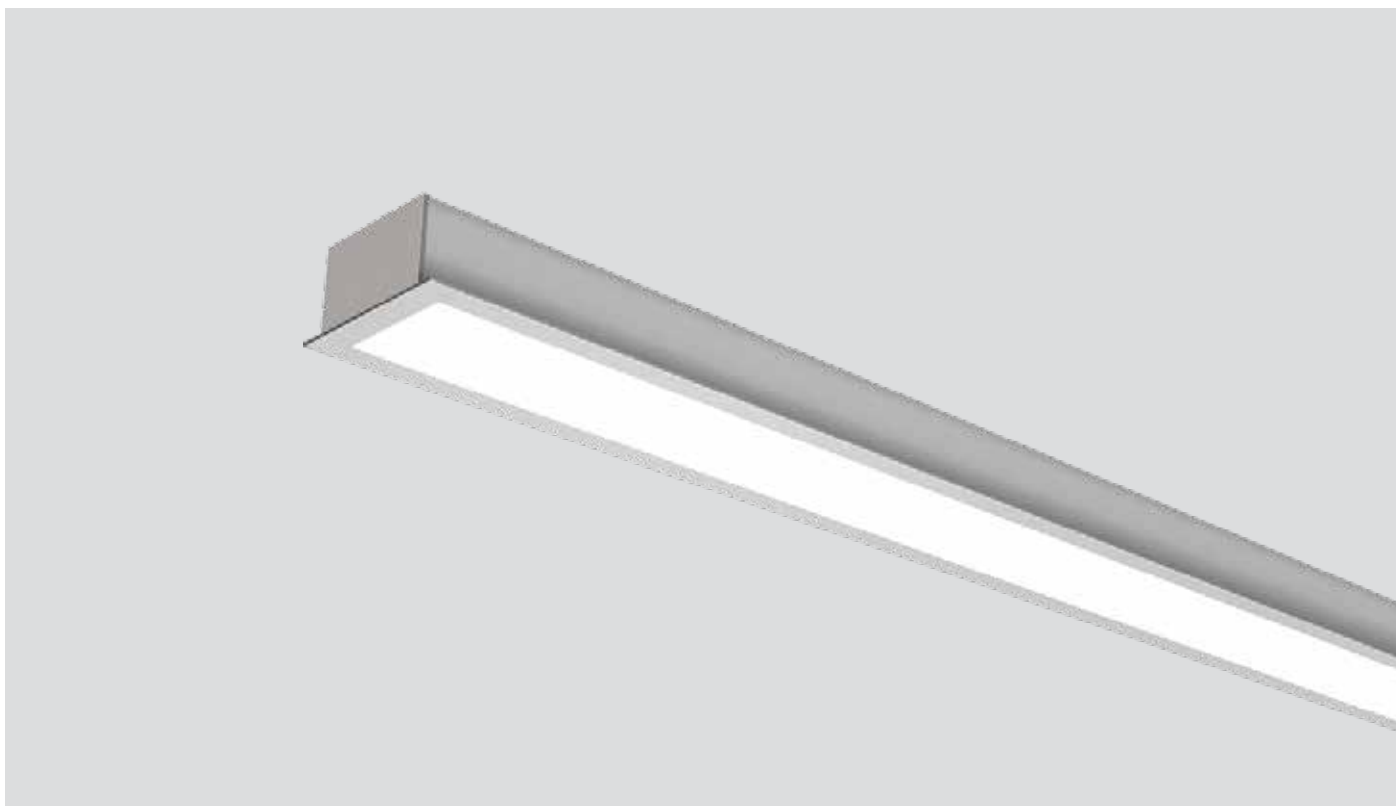

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Temperature	: 0°C~+50°C

Physical

Body	: Extruded Aluminium Profile
Mounting	: Recess
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Light Source

Light Source	: LUMILED / NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 6000K

Driver

Power Supply	: Non Integral
Power Factor	: >0.90
THD	: <15%
Surge Protection	: 3KV
Efficiency	: >85%

Optical

Tilt	: Fixed
Beam Angle	: 115°
Diffuser Material	: PC Opal Matt / Prismatic Diffuser
UGR	: <21

Ordering Guide

Recess - Direct - Opal Matt

ID	Wattage	Dimension (mm)
2854	30W	1200 x 64 x 35
2855	40W	1200 x 64 x 35
2858	60W	2400 x 64 x 35

Recess - Direct - Prismatic

ID	Wattage	Dimension (mm)
2851	30W	1200 x 64 x 35
2852	40W	1200 x 64 x 35
2853	60W	2400 x 64 x 35

K-LITE

LEVO WIDE

Power : 40W 80W
Length : 1200 mm 2400 mm

Upto
100
lm/w

Features

- LUMILED / NICHIA
- 3000K / 4000K / 6000K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 50,000 Hrs



198-264V 50Hz

Options

- Through wiring
- Dimmable options



Switchable



Beam Angle




115°
Diffused



RECESSED



Dimension
in mm




Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online

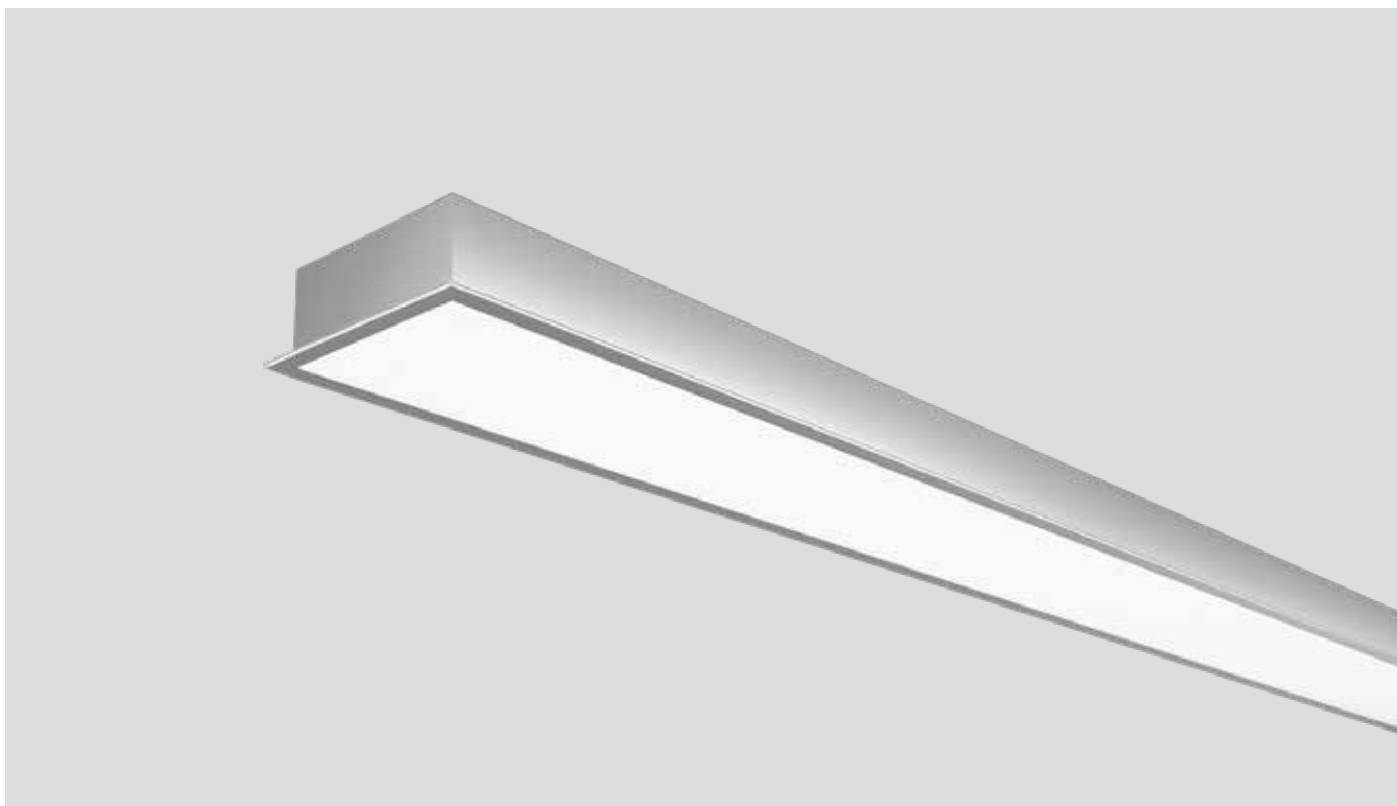

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Temperature	: 0°C~+50°C

Light Source

Light Source	: LUMILED / NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 6000K

Optical

Tilt	: Fixed
Beam Angle	: 115°
Diffuser Material	: PC Opal Matt Diffuser
UGR	: <21

Physical

Body	: Extruded Aluminium Profile
Mounting	: Recess
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver


Power Supply	: Non Integral
Power Factor	: >0.90
THD	: <15%
Surge Protection	: 4KV
Efficiency	: >85%

Ordering Guide

Recess - Direct

ID	Wattage	Dimension (mm)
2856	40W	1200 x 86.5 x 35
2857	80W	2400 x 86.5 x 35



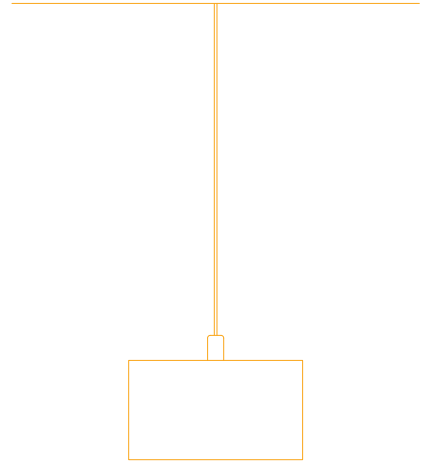

RIO

Low UGR.
Ideal for offices

Bringing quality light with cost-savings.
Due to its length and low UGR, Rio delivers a homogenous and efficient distribution of light and reduces the luminaires per room. Therefore, Rio is most suitable for open-space offices, corridors, foyers, conference rooms, classrooms and other spacious environment.

RIO

Power : 20W 40W
Length: 612mm 1212mm

Upto
110
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L1: Matt Black, UGR <16

Beam Angle



50°

L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle




34°



48°

Accessories




Canopy Kit

For control unit
Bespoke Colour Options



PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension
in mm

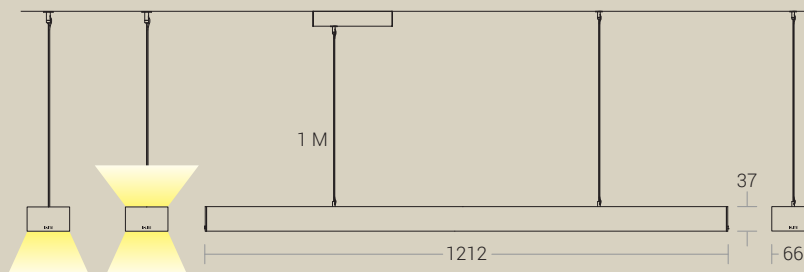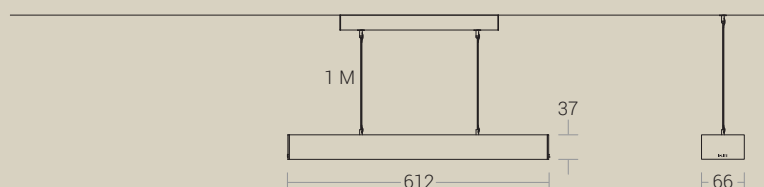

Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture


Light Distribution refer online



L1



L2

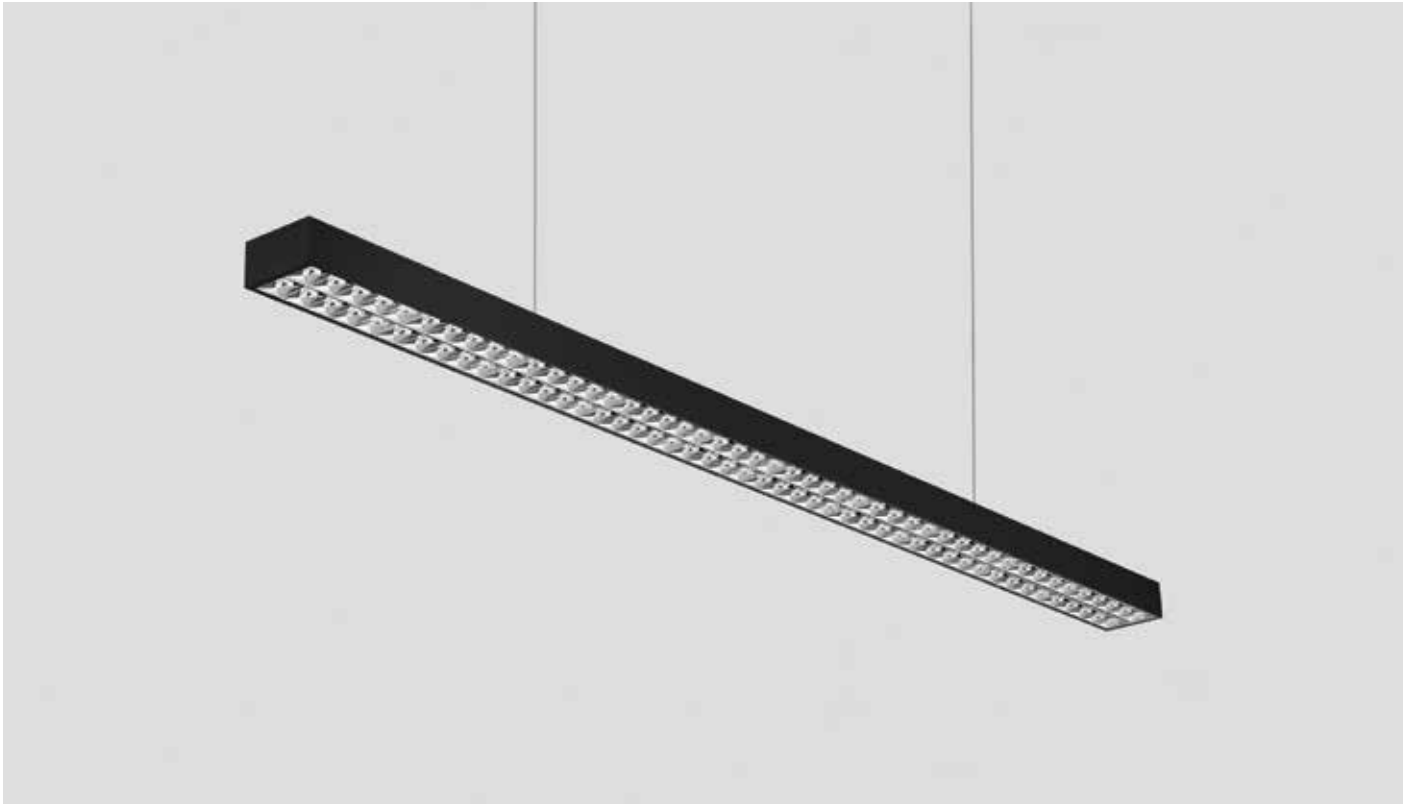

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 50° / 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Matt Black / Vacuum Metalized Chrome Finish
UGR	: L1 - <16 / L2 - <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Lens Option	Dimension (mm)
3474	20W	L1	572 x 66 x 37
3474	20W	L2	612 x 66 x 37
3475	40W	L1	1132 x 66 x 37
3475	40W	L2	1212 x 66 x 37

Pendant - Direct-Indirect

ID	Wattage	Lens Option	Dimension (mm)
3461	20W & 10W	L1	572 x 66 x 37
3461	20W & 10W	L2	612 x 66 x 37
3425	40W & 20W	L1	1132 x 66 x 37
3425	40W & 20W	L2	1212 x 66 x 37

Pendant Direct : ID + L1

Pendant Direct-Indirect : ID + L1

K-LITE

RIO

Power : 20W 40W 20W & 10W 40W & 20W
Length: 612mm 1212mm 612mm 1212mm

Upto
110
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle



34°



48°




WALL LIGHT
DIRECT



WALL LIGHT
DIRECT / INDIRECT



Dimension
in mm

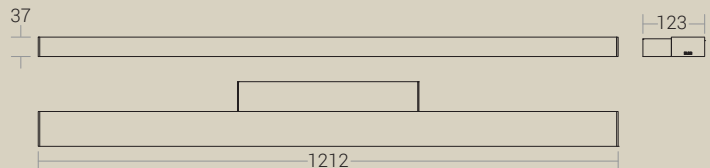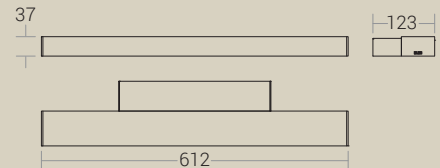

Housing Colour




High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



L2

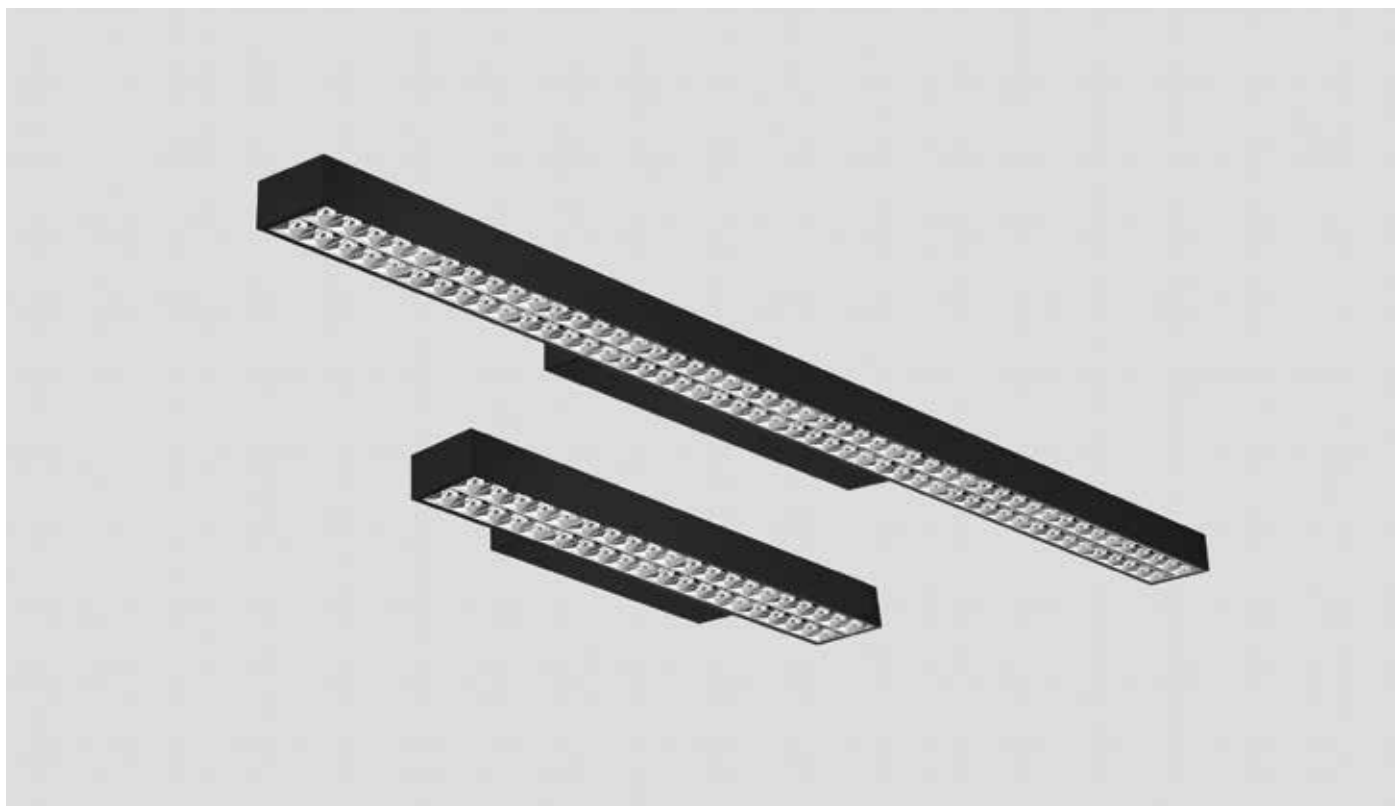

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Wall
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV
Efficiency	: >85%


Ordering Guide


Wall Light - Direct

ID	Wattage	Dimension (mm)
3515	20W	612 x 123 x 37
3517	40W	1212 x 123 x 37

Wall Light - Direct-Indirect

ID	Wattage	Dimension (mm)
3516	20W & 10W	612 x 123 x 37
3518	40W & 20W	1212 x 123 x 37

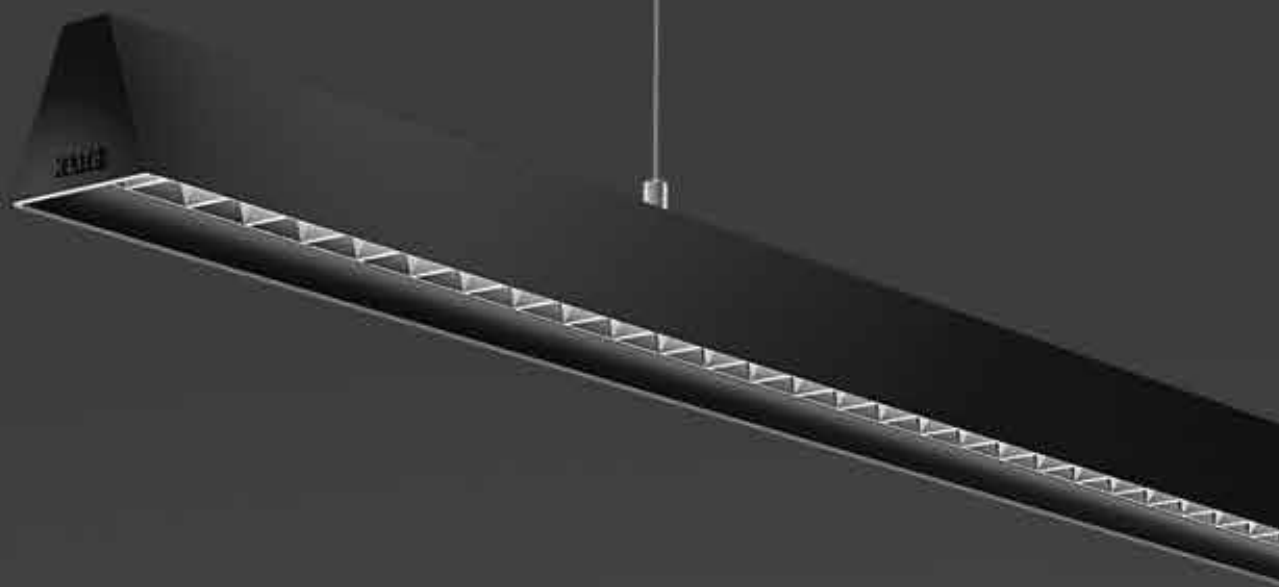

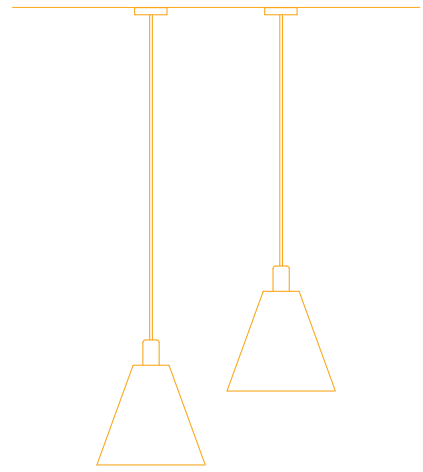

ARC

Elegance of Simplicity

Arc-L & D Pendant Direct / Indirect luminaire, offers high quality, economical and easy to install modular lighting solutions. It offers premium lighting environment for sustainable Offices, Educational institutions, Retail and General areas. High-performance optic for maximum light efficiency and glare controlled light distribution with low UGR.

K-LITE

ARC-L

Power : 30W/40W 60W 90W
Length: 1188mm 2364mm 3540mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- Through wiring
- Dimmable options




Beam Angle



50°

Accessories



Canopy Kit

For control unit
Bespoke Colour Options


PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension
in mm

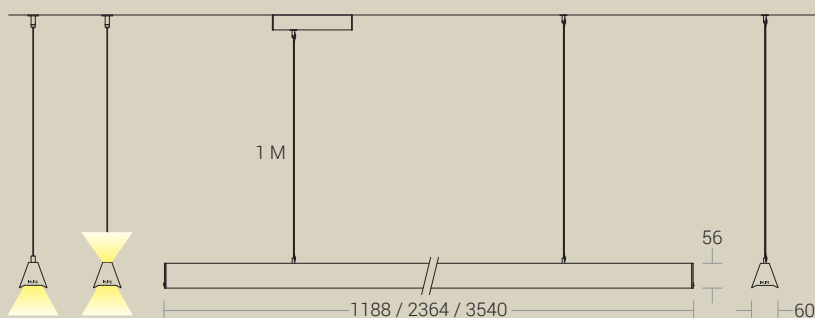


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution





Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 50°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Hexa-Cell (Matt Black)
UGR	: <14

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3476	30W	1188 x 60 x 56
3477	40W	1188 x 60 x 56
3478	60W	2364 x 60 x 56
3479	90W	3540 x 60 x 56

Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3428	30W & 10W	1188 x 60 x 56
3429	40W & 10W	1188 x 60 x 56
3439	60W & 20W	2364 x 60 x 56
3440	90W & 20W	3540 x 60 x 56

K-LITE

ARC-D

Power : 30W / 40W 60W 90W
Length : 1200mm 2400mm 3540mm



Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- Through wiring
- Dimmable options




Beam Angle



105°
Diffused


Accessories



Canopy Kit

For control unit
Bespoke Colour Options


PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension in mm

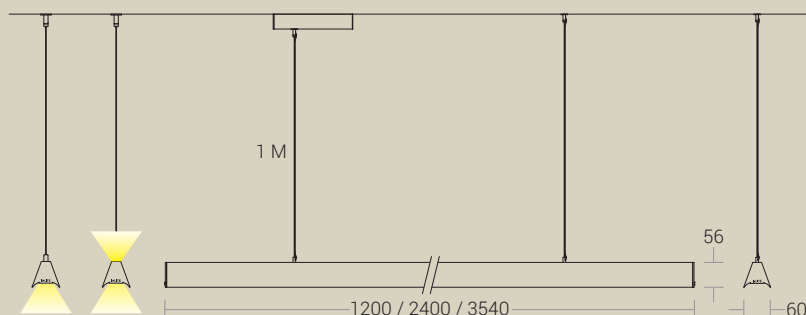



Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution

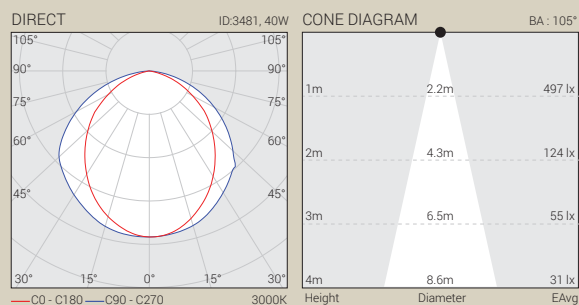

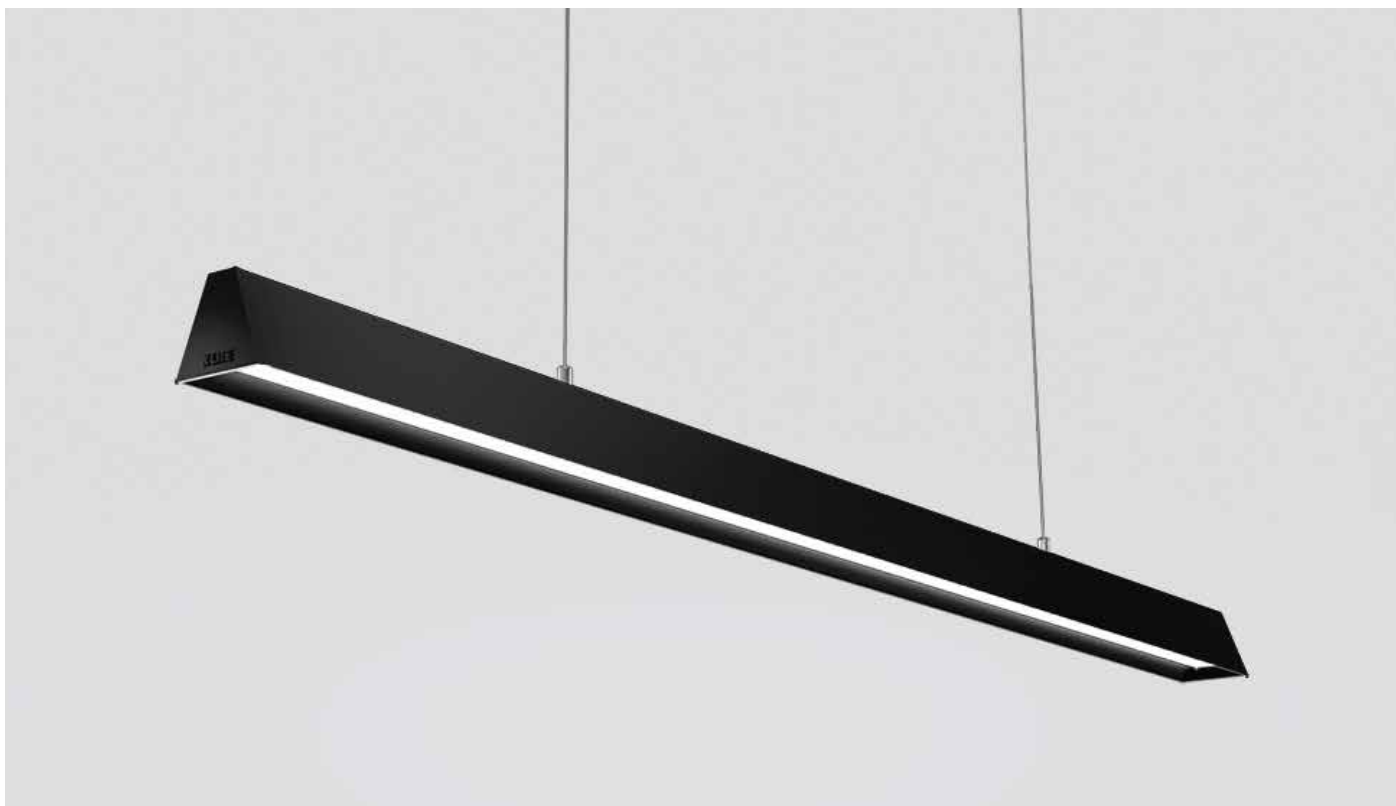

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 105°
Diffuser Material	: PC Opal Diffuser
UGR	: <19

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide


Pendant - Direct

ID	Wattage	Dimension (mm)
3480	30W	1200 x 60 x 56
3481	40W	1200 x 60 x 56
3482	60W	2400 x 60 x 56
3483	90W	3540 x 60 x 56

Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3435	30W & 10W	1200 x 60 x 56
3436	40W & 10W	1200 x 60 x 56
3437	60W & 20W	2400 x 60 x 56
3438	90W & 20W	3540 x 60 x 56



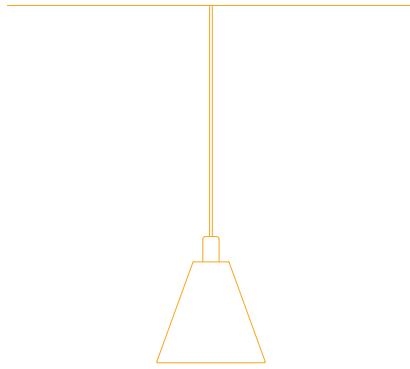

TRIO

Soft Light

Geometry of a triad and appearance of soft light.
Easy to install and adjust.

Emitting light both up to the ceiling and down to the work station. It supplies homogenous glare-free light and maximum level of visual comfort. It is a new favorite of modern simple yet stylish office lighting.

K-LITE

TRIO

Power : 30W / 40W 60W
Length: 1200mm 2400mm

Upto
100
lm/w

Features

- NICHIA LED's
- 3000K / 4000K / 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- Through wiring
- Dimmable options




Beam Angle



120°
Diffused


Accessories



Canopy Kit

For control unit
Bespoke Colour Options


PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension
in mm

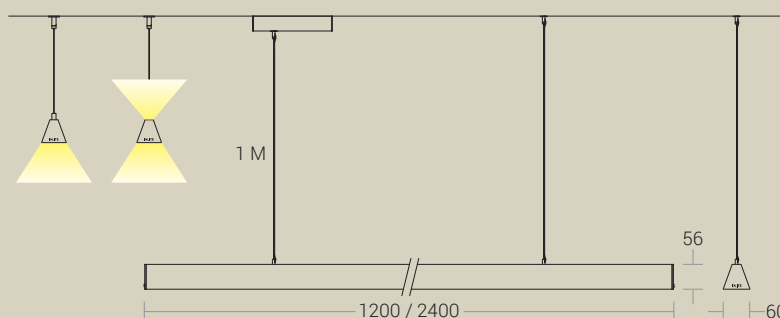


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution

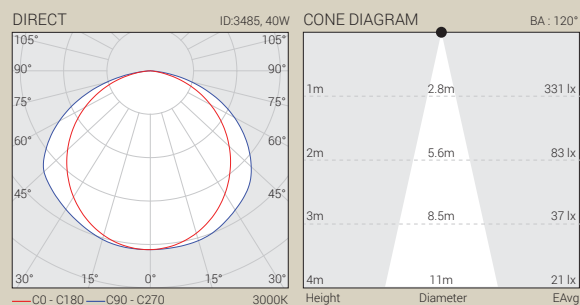



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 120°
Diffuser Material	: Polycarbonate
Diffuser Finish	: Opal
UGR	: <19

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct


ID	Wattage	Dimension (mm)
3484	30W	1200 x 60 x 56
3485	40W	1200 x 60 x 56
3486	60W	2400 x 60 x 56

Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3433	30W & 10W	1200 x 60 x 56
3434	40W & 10W	1200 x 60 x 56
3441	60W & 20W	2400 x 60 x 56

INSPIRATION



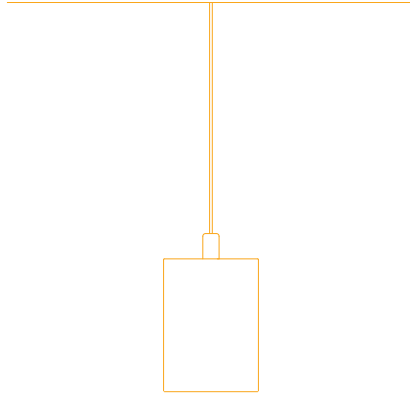

DEEP

Unobstructed Light Line

Linear pendant lighting designed for continuous lighting systems. Unobstructed illumination offering coherent solutions suitable for any kind of space.

Our modern, slim profiles and stylish linear design offer excellent direct lighting, exceptional performance and versatility combined with visually comfortable and efficient light for offices, conference rooms, museums, retail outlets, hotels, restaurants and more.

K-LITE

DEEP

Power : 30W / 40W

Length: 1200mm

Upto
100
lm/w

Features

- NICHIA LED's
- 3000K / 4000K / 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- Through wiring
- Dimmable options




Beam Angle



120°
Diffused


Accessories




Canopy Kit

For control unit
Bespoke Colour Options

PENDANT
DIRECT

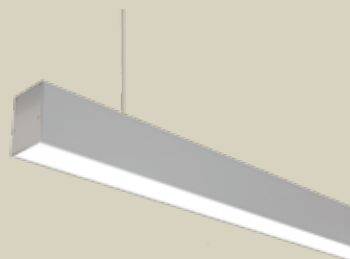

Dimension
in mm

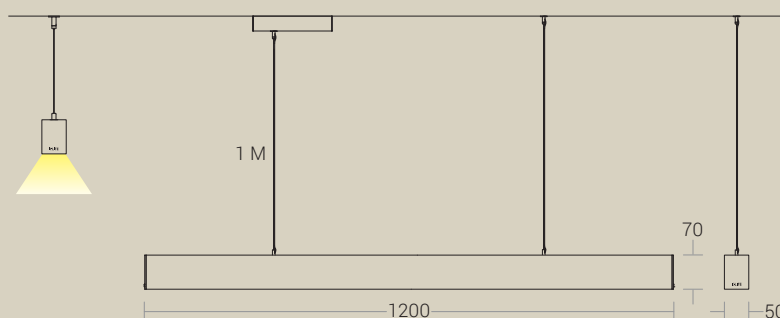



Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution



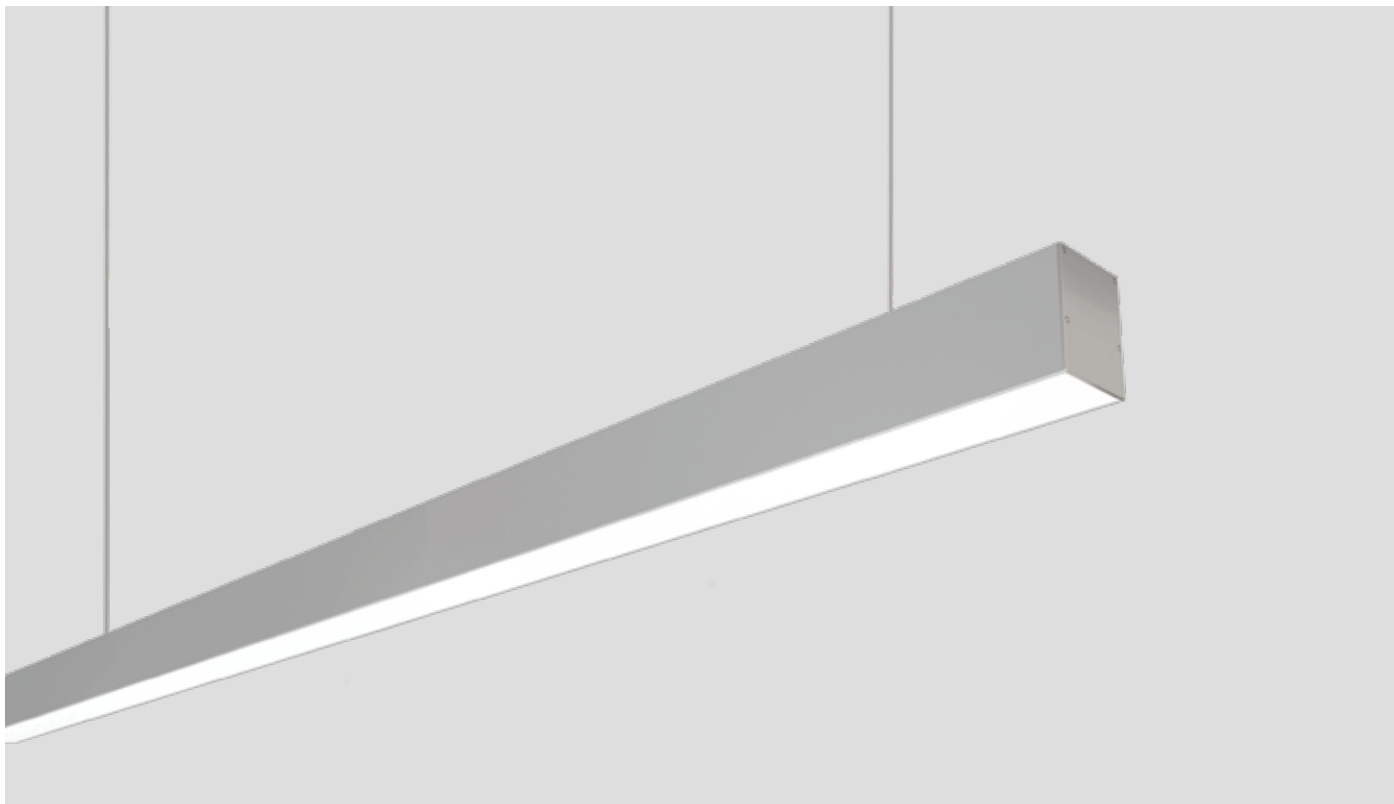

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 120°
Diffuser Material	: Polycarbonate
Diffuser Finish	: Opal Matt
UGR	: <19

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3411	30W	1200 x 50 x 70
3412	40W	1200 x 50 x 70

K-LITE

POWER WASH

Power : 40W 80W
Length : 1214 mm 2400 mm

Upto
100
lm/w

Features

- NICHIA LED's
- 3000K / 4000K / 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs




198-264V 50Hz

Options



- Through wiring
- Dimmable options



RECESSED



Dimension
in mm





Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution



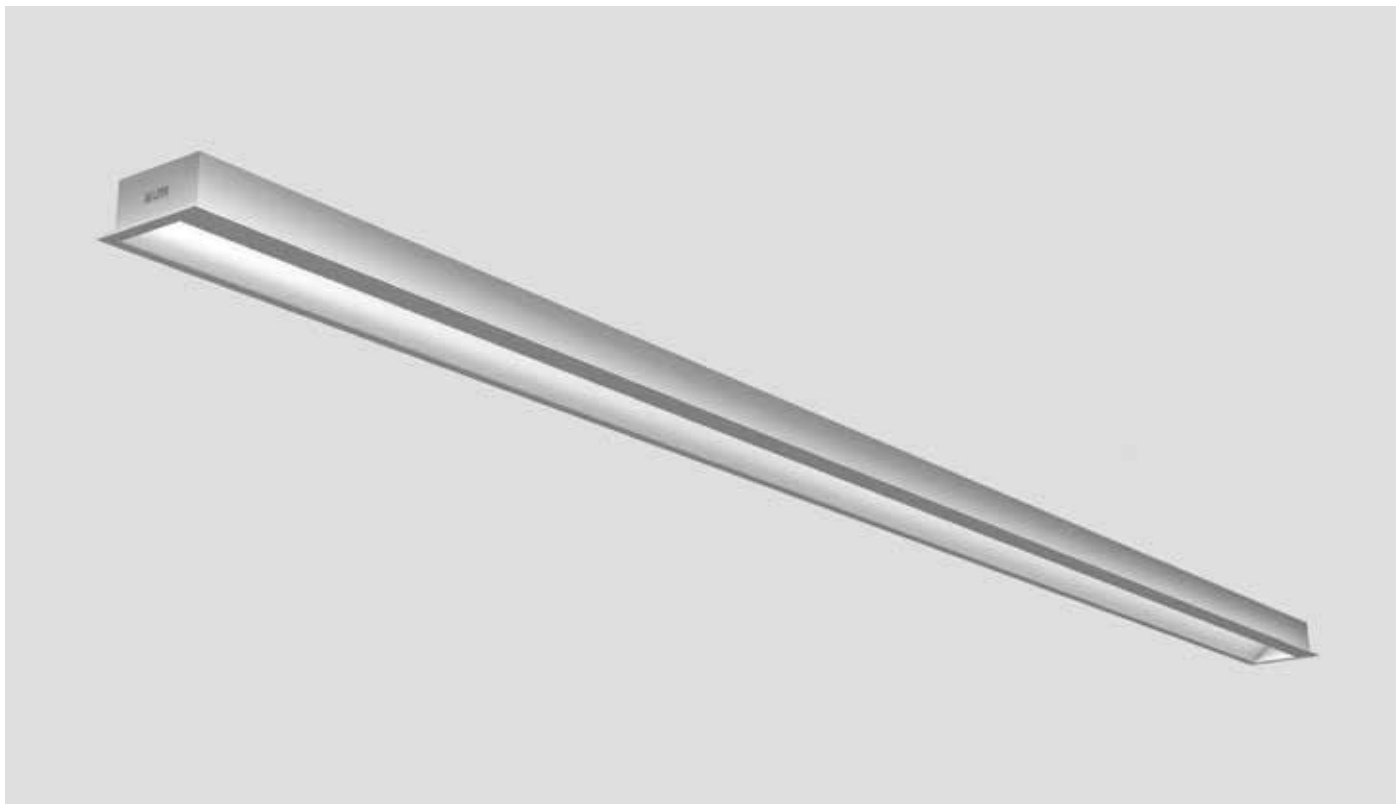

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Diffuser/Lens Material	: PC Opal diffuser
UGR	: <19

Physical

Body	: High-Grade Aluminium with Endcaps
Mounting	: Recessed
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Recess - Direct

ID	Wattage	Dimension (mm)	C.O.D
3394	40W	1214 x 58 x 27	1203 x 48
3395	80W	2400 x 58 x 27	2389 x 48



POWER GRAZE

Power Graze emphasises the tactile qualities of architectural materials. The grazing light brings out the finest wood concrete or natural stone texture thereby enabling the luminaire to set off historic features or regional materials.

The resulting special rendering of vertical illuminance combines strikingly illuminated texture for scenic effect with efficient room lighting for places such as restaurants and hotels.



K-LITE

POWER GRAZE

Power : 18W 36W 72W
Length : 600mm 1200mm 2400mm



Features

- OSRAM LED's
- 3000K / 4000K / 5700K
- Ra>90
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs



Options

- Through wiring
- Dimmable options
- Suitable for Double / Triple height ceiling




CEILING



Dimension
in mm



Light
Distribution





Technical Specifications

General

Driver : Constant Current
Input Voltage : 220-240Vac
Operating Temperature : 0°C~+50°C

Physical

Body : Aluminium profile
Mounting : Surface Mounted as continuous band of light
Diffuser : Secondary optics made optical polymer
Fixing Clip : Metal, Black powder coated

Light Source

Light Source : LED's on metal-core PCB
CRI (Ra) : >90
R9 : >50
LED Colour Temperature : 3000K / 4000K / 5700K

Driver

Power Supply : Non Integral
Power Factor : >0.9 - >0.97
THD : <10%
Surge Protection : 4KV
Efficiency : >85%

Optical

Tilt : 10°
Beam Angle : 6°
Diffuser Material : Polycarbonate
Secondary optics : Elliptical Optical Polymer
UGR : <19

Ordering Guide

Surface - Direct



ID	Wattage	Dimension (mm)
3384	18W	600 x 53 x 71
3237	36W	1200 x 53 x 71
3385	72W	2400 x 53 x 71

RGB



ID	Wattage	Dimension (mm)
3387	18W	600 x 53 x 71
3388	36W	1200 x 53 x 71
3389	72W	2400 x 53 x 71

RGBW


ID	Wattage	Dimension (mm)
3391	24W	600 x 53 x 71
3392	48W	1200 x 53 x 71
3393	96W	2400 x 53 x 71



Excellent visual comfort
Due to the small installation dimensions of Power Graze, the luminaires remain concealed and thus support ideal visual comfort.



Tiltable by 10°
After installation, Power Graze can be tilted by +/- 10° within the mounting profile to optimise the light distribution along the wall. Continuous line installation The Power Graze luminaires can be installed in a continuous line to achieve maximised and uniform illuminance distribution on the wall.

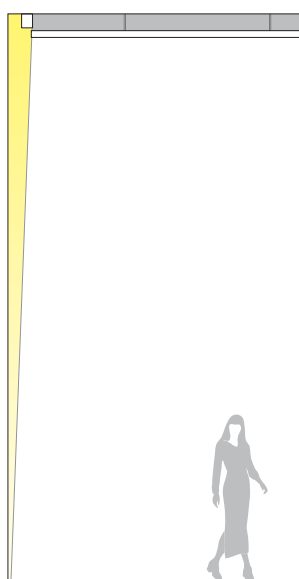

Asymmetrical light distribution, this wall grazer can be positioned up to 10cm close to the wall and still produce an exceptionally uniform beam for ceiling height up to 10mtrs height. The resulting special rendering of vertical illuminance creates a striking scenic effect with efficient accent lighting for hotels, restaurants, office, lobbies etc.

INSPIRATION



K-LITE

INFINITY

Power : 24W 36W 48W
Length : Ø600mm Ø900mm Ø1200mm

Upto
90
lm/w

Features

- LUMILED LED's
- 3000K / 4000K / 5700K
- Ra>80
- SDCM ≤ 3
- L70 / B10 @ 59,000 Hrs
- Standard suspension kit 1M



Options

- Through wiring
- Dimmable options




Beam Angle



120°
Diffused

Accessories




Canopy Kit

For control unit
Bespoke Colour Options

PENDANT
DIRECT



Dimension in mm

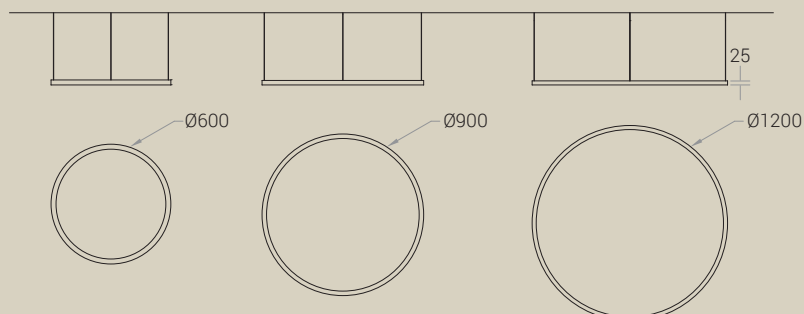


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Application



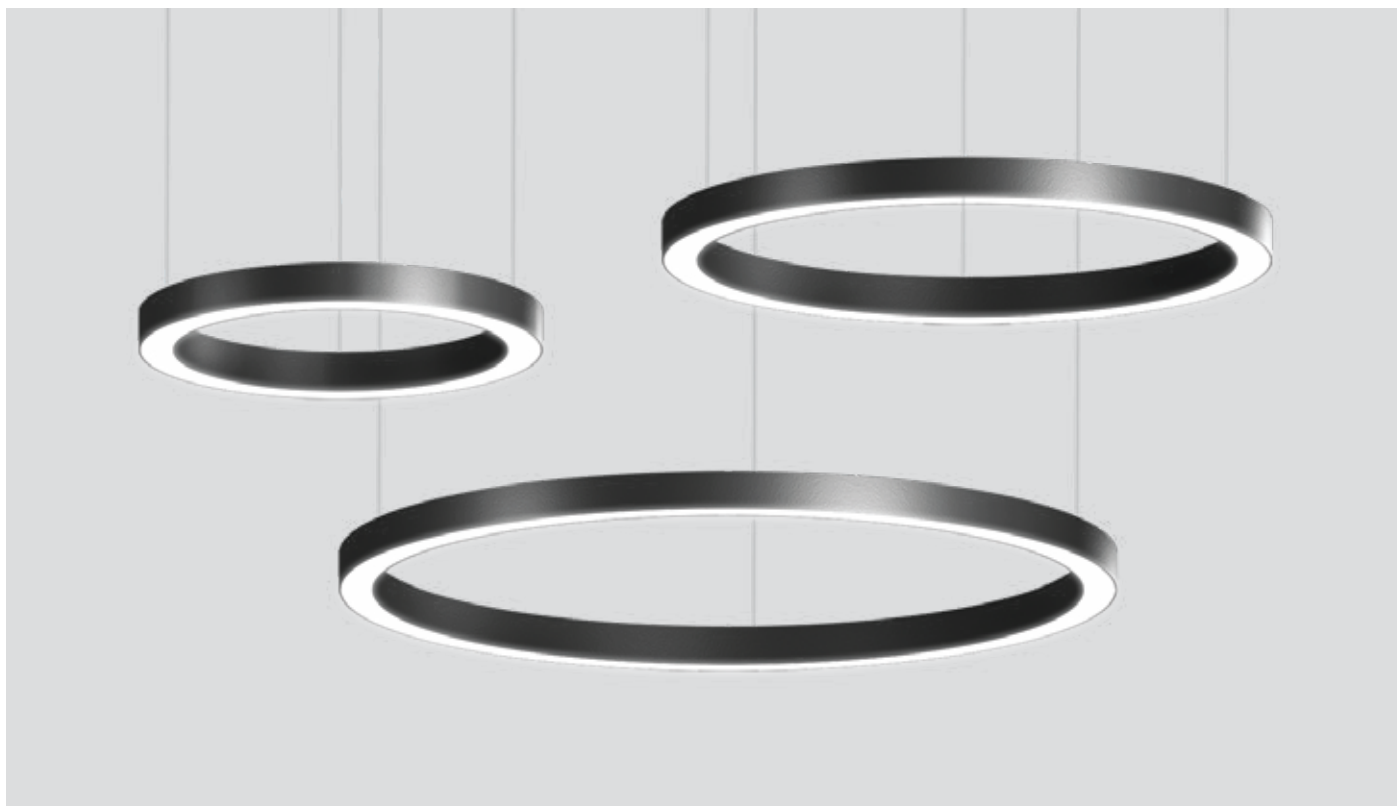

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 110-265Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: LUMILED
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 120°
Diffuser Material	: Translucent PC

Physical

Body	: High-Grade Aluminium
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)



Driver


Power Supply	: Integrated
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3231	24W	Ø600 x 25
3232	36W	Ø900 x 25
3233	48W	Ø1200 x 25

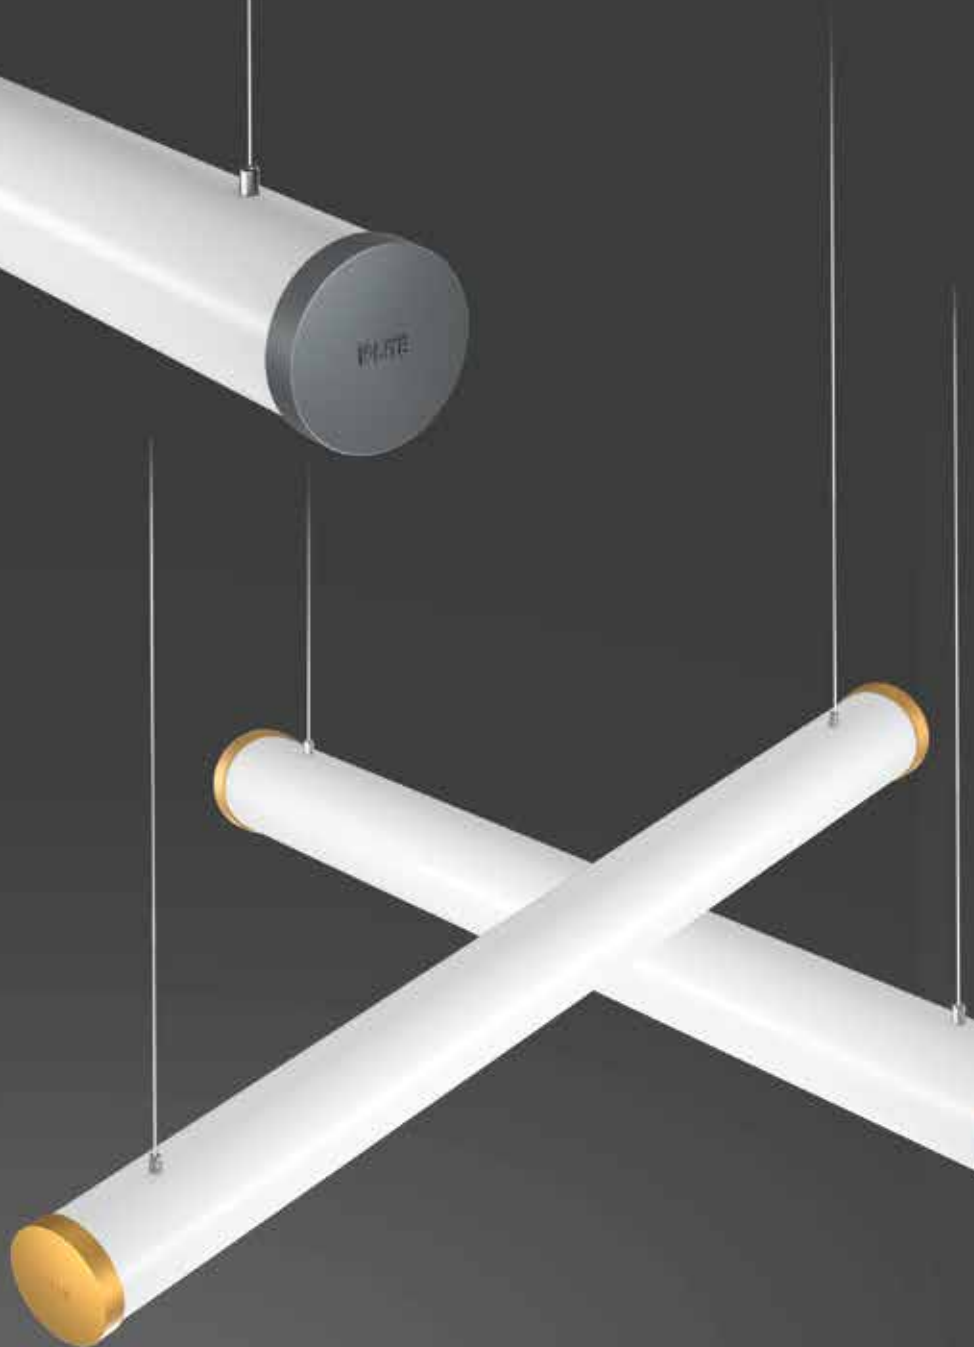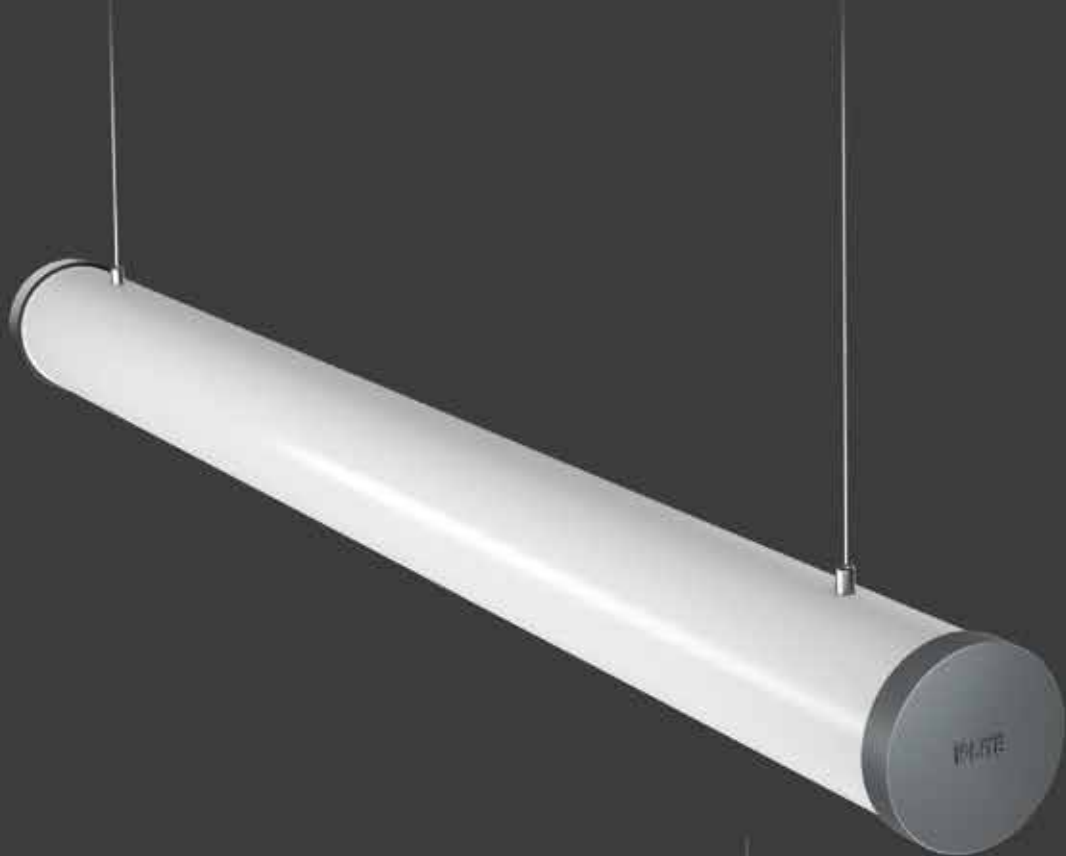

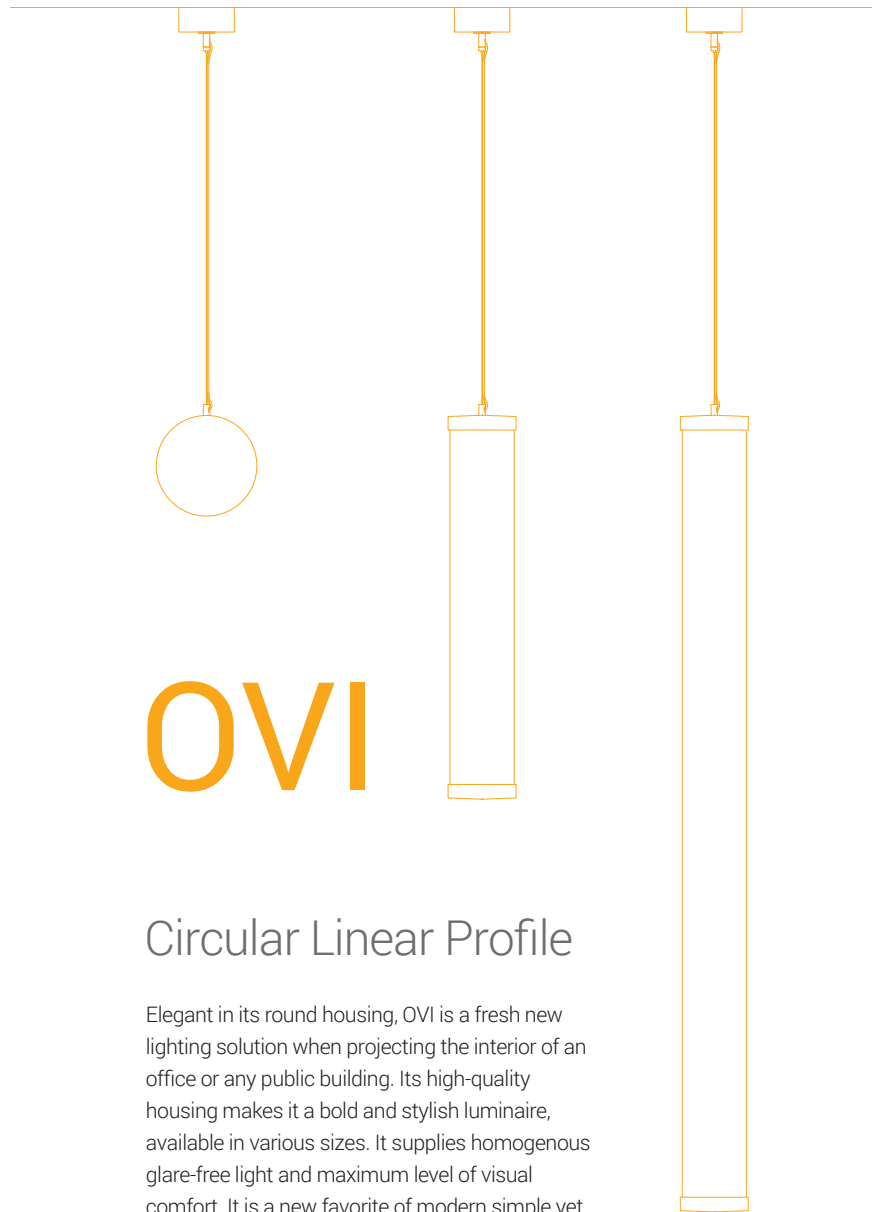

OVI

Circular Linear Profile

Elegant in its round housing, OVI is a fresh new lighting solution when projecting the interior of an office or any public building. Its high-quality housing makes it a bold and stylish luminaire, available in various sizes. It supplies homogenous glare-free light and maximum level of visual comfort. It is a new favorite of modern simple yet stylish office lighting.

K-LITE

OVI

Power : 36W 72W
Length : 1245mm 2400mm

Upto
100
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options



Beam Angle




360°



360°


Accessories




Canopy Kit

For control unit
Bespoke Colour Options

PENDANT



Dimension in mm

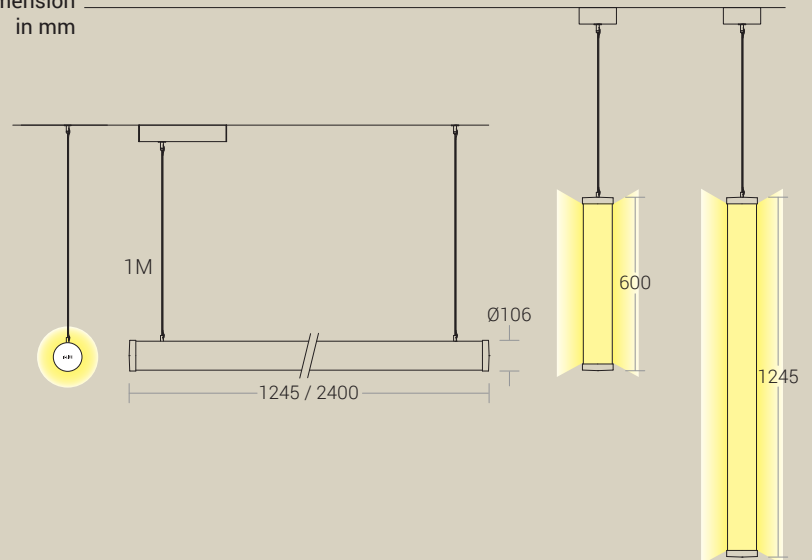


Housing Colour



High-quality Die-cast aluminium Endcaps with powder coated finish in RAL9005 Black fine texture I RAL9006 Grey fine texture. Liquid painting Sparkle Gold.

Light Distribution refer online

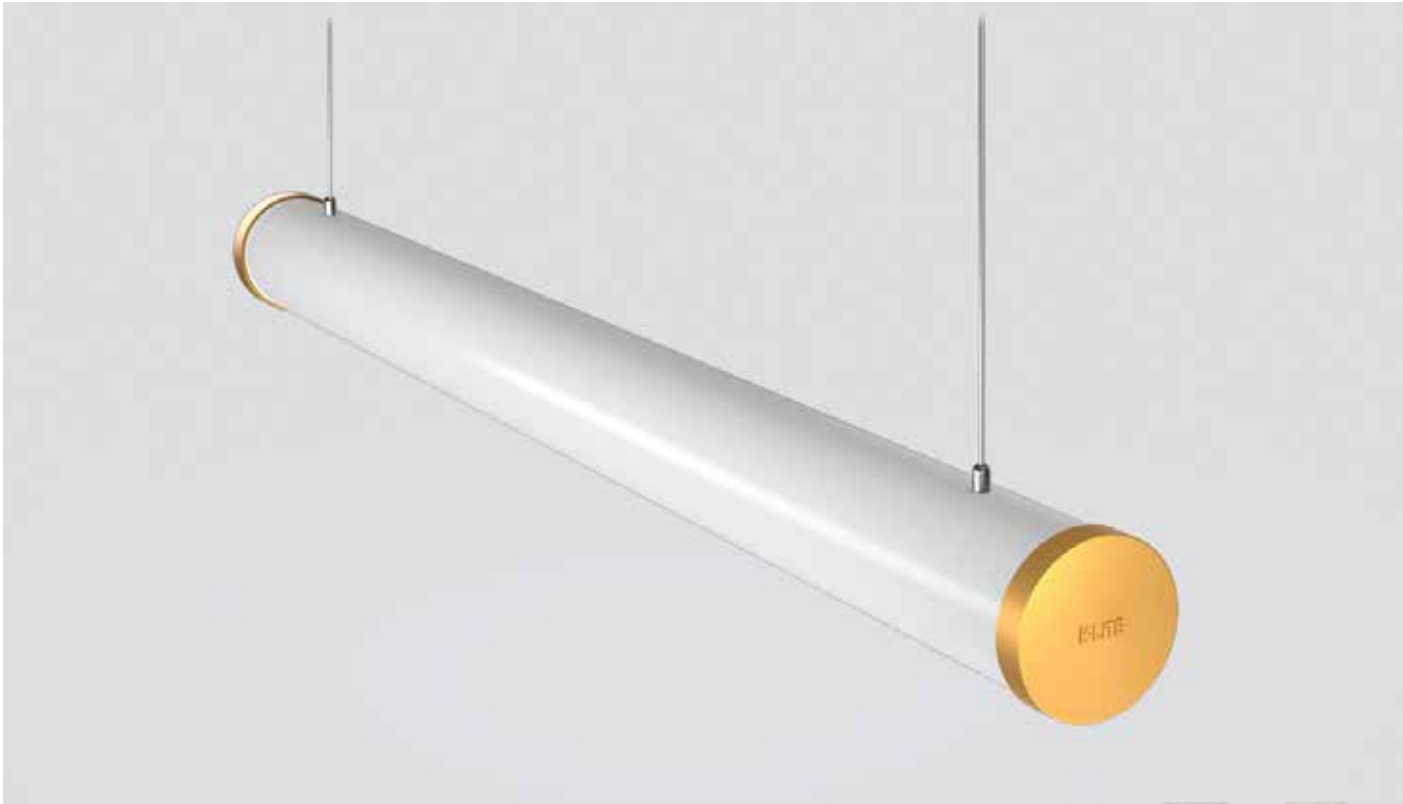

Technical Specifications

General

Driver : Constant Current
Input Voltage : 220-240Vac
Operating Temperature : +25°C~+55°C

Light Source

Light Source : NICHIA
CRI (Ra) : >80 (>90 On Request)
LED Colour Temperature : 3000K / 4000K / 5700K

Optical

Tilt : Fixed
Beam Angle : 360°
Diffuser Material : Opal Polycarbonate
UGR : <16

Physical

Body : Polycarbonate Tube with Die-cast Endcaps
Mounting : Suspended
Finish : Black (RAL9005)
Grey (RAL9006)
Sparkle Gold (Liquid Paint)

Driver

Power Supply : Integrated
Power Factor : >0.95
THD : <10%
Surge Protection : 3KV
Efficiency : >85%

Ordering Guide

Pendant

ID	Wattage	Dimension (mm)
3462	36W	1245 x Ø106
3463	72W	2400 x Ø106

Pendant - Vertical

ID	Wattage	Dimension (mm)
3495	18W	600 x Ø106
3496	36W	1245 x Ø106



K-LITE

INSPIRATION



Features

- Polyester Fibre Acoustic Panels
- Thickness : 10mm
- High Acoustic Performance - upto 0.9NRC
- High resistance to Humidity and Moisture
- Light weight / Flexible
- Easy installation
- Impact resistance
- Made from recycled PET waste
- Bespoke colours





K-LITE

XIO

Power : 20W 2 x 20W
Length: 1000mm 1000mm

Upto
120
lm/w

Features

- NICHIA LED's
- 3000K / 4000K / 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs




Options

- Through wiring
- Dimmable options



L2: Vacuum Metalized Chrome Finish, UGR <12


Beam Angle



34° 48°



Dimension
in mm

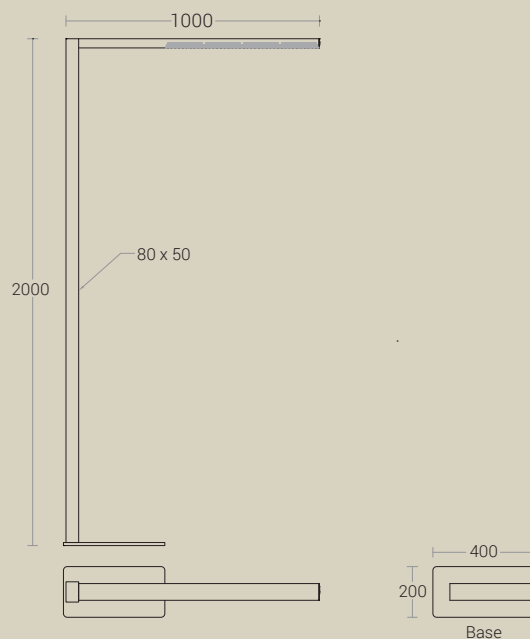

Housing Colour




High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



L2

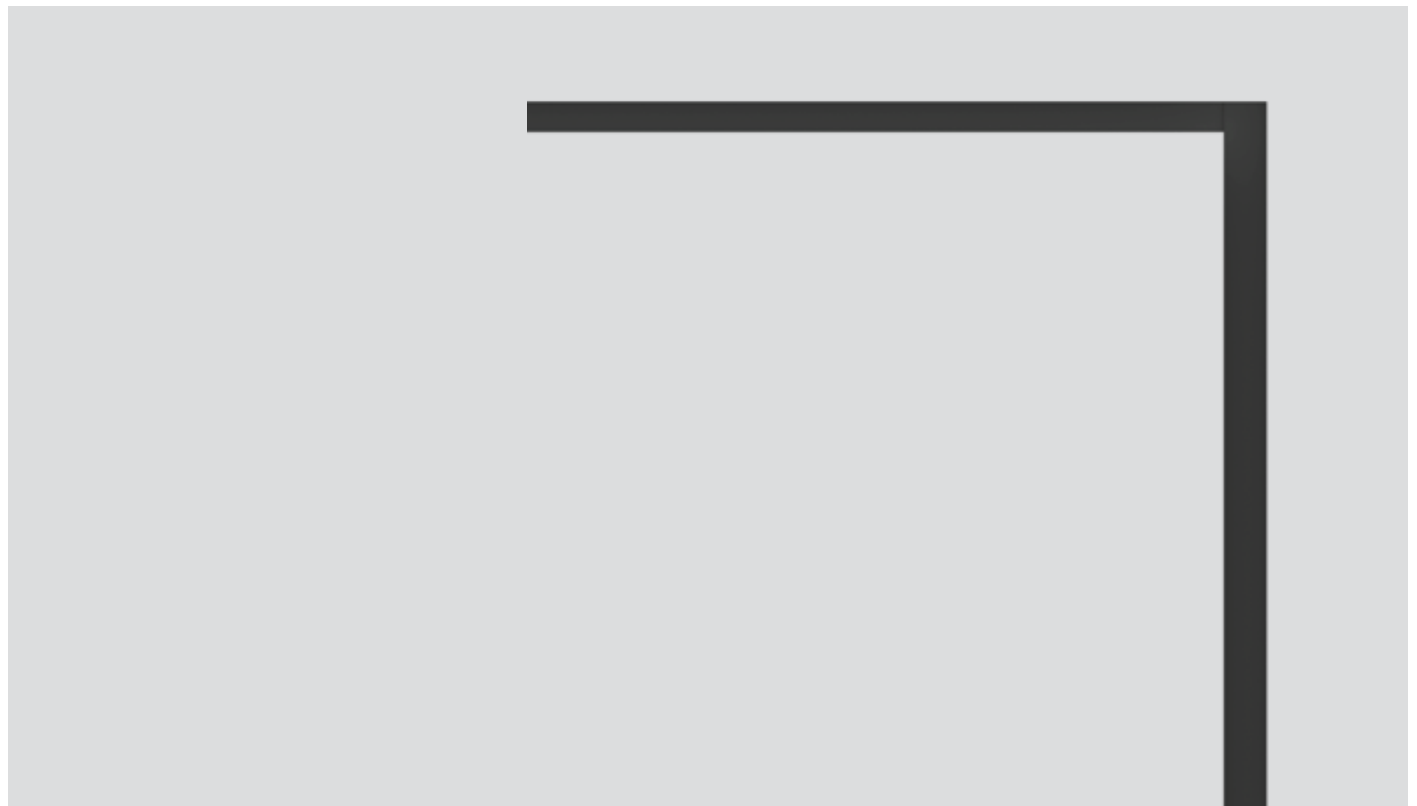

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Floor - Surface
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Floor - Surface - Direct

ID	Wattage	Dimension (mm)
3499	20W	1000 x 200 x 2000

Floor - Surface - Direct-Indirect

ID	Wattage	Dimension (mm)
3500	2 x 20W	1000 x 200 x 2000







Linear Lighting will to suit ceiling / wall / pendant is a slim and elegantly designed fixture, suited for varied applications offers a uniform, glareless and soft lighting.

Product Description

- Luminaire made of extruded aluminium for better thermal management.
- PC clear / semi clear matte / opal matte diffuser for excellent diffused lighting experience throughout the life of the fixture.
- Designed for mounting on ceiling / wall / pendant.
- Cable entries for through-wiring of mains supply cable
- To be used with LED strip & power supply unit of suitable rating.

Product Benefits

- Attractive high quality housing.
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.








Specifications

- Standard length in multiples of 4ft module.
- Our constant current rigid led strips are powered by **LUMILEDS** offer a colour tolerance of 3 step MacAdams.
- Suspension kit set ID 8293 - 1m & ID 8294 - 2m.
- Standard Profile finish is Anodised AL. Customised Powder coating finish available on request at extra cost.

Area of Application


Corporate Offices, Malls, Restaurants, Receptions, Corridors, Commercial & Business Centers, Residential lighting, etc.

LED Linear Lightings - Recess Mounted

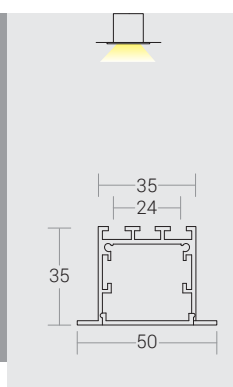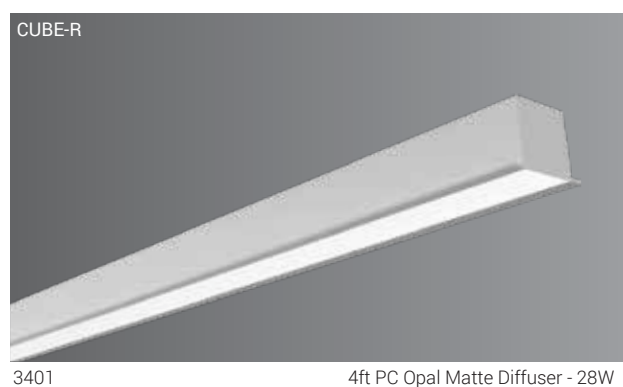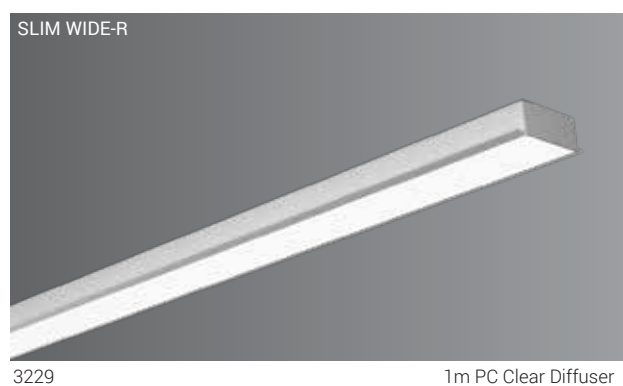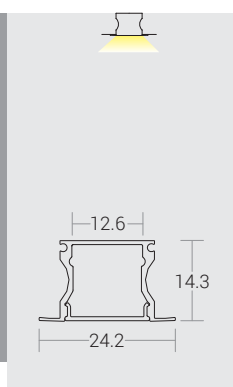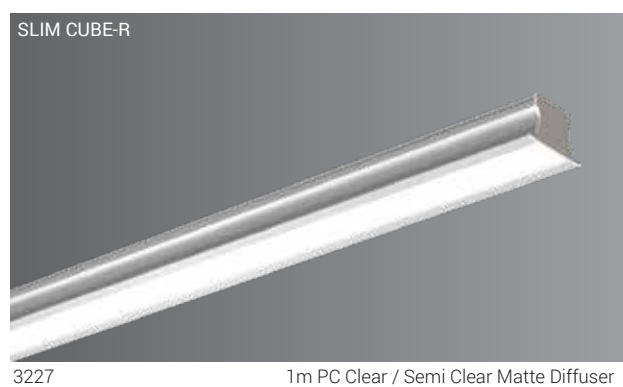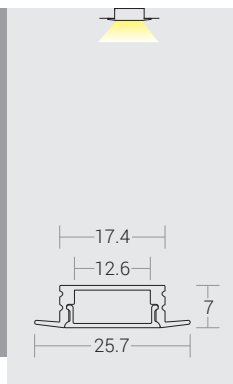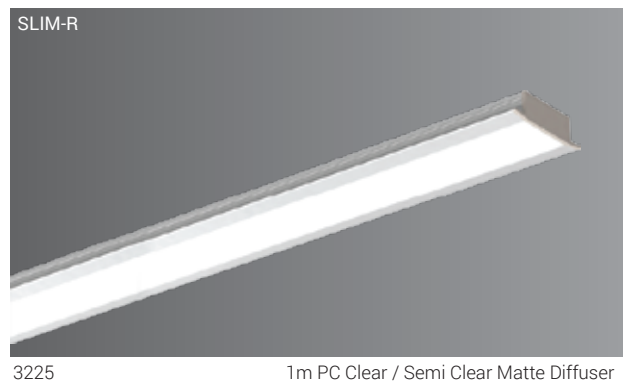

LED Linear Lightings - Surface / Suspended

BENDABLE

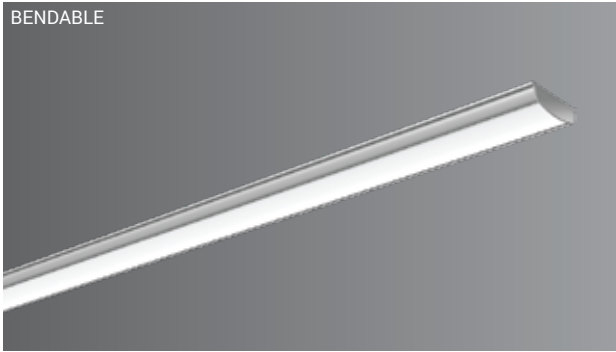

2863

1m PC Opal Diffuser




ANGLE



3084

1m PC Clear / Opal Matte Diffuser

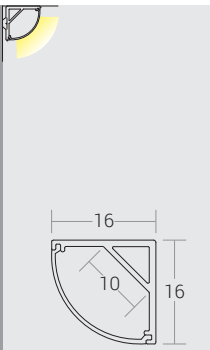


SLIM-S




3082

1m PC Clear / Semi Clear Matte Diffuser




SLIM CUBE-S

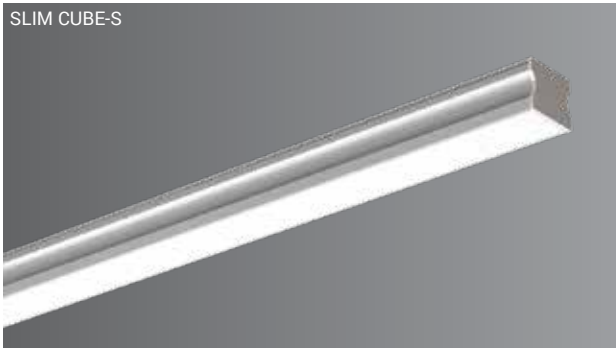


3226

1m PC Clear / Semi Clear Matte Diffuser






SLIM WIDE-S

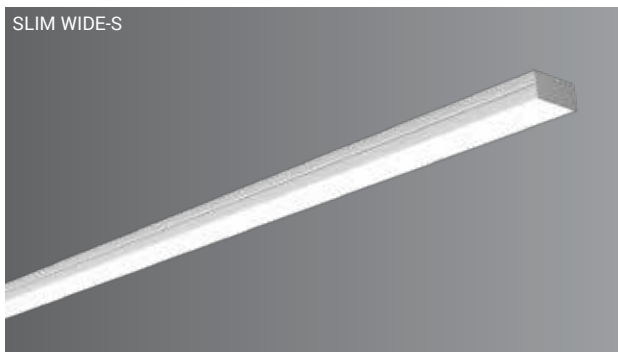

3228

1m PC Diffuser




CUBE-S



3402

4ft PC Opal Matte Diffuser - 28W

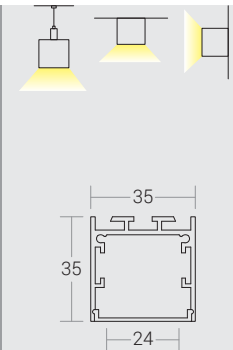


UPDOWN




3400

4ft Opal Matte Diffuser - 40W & 12W

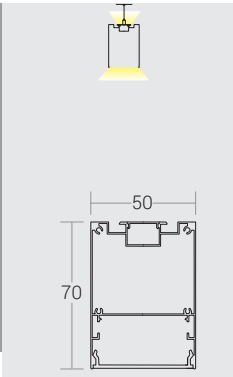


LED Linear Lightings - Surface / Suspended

RECTA-S

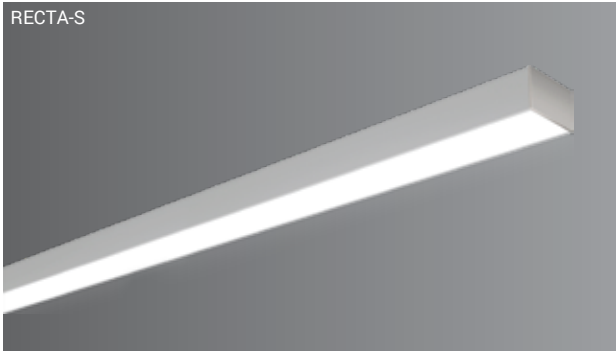


3407 / 3408

4ft PC Opal Matte Diffuser-30W / 40W

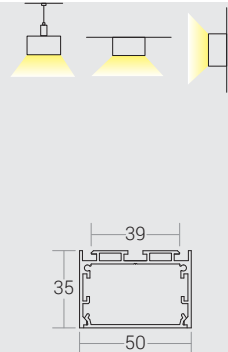


DEEP WIDE

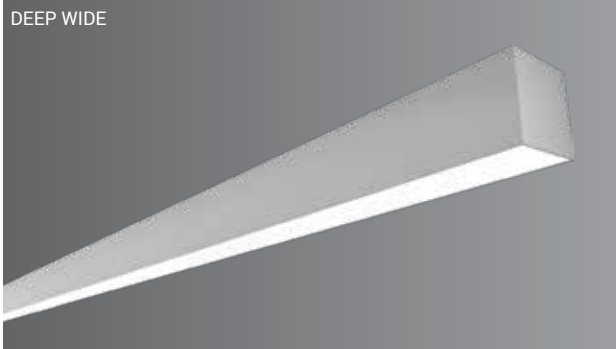


2860 / 2859

4ft PC Opal Matte Diffuser-40W / 60W




WIDE-S

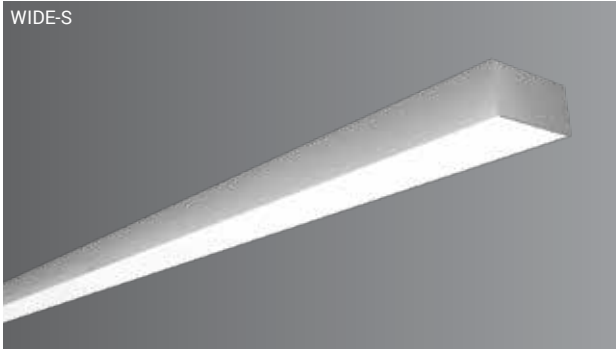


3419 / 3420

4ft PC Opal Diffuser-40W / 60W




UP & DOWN

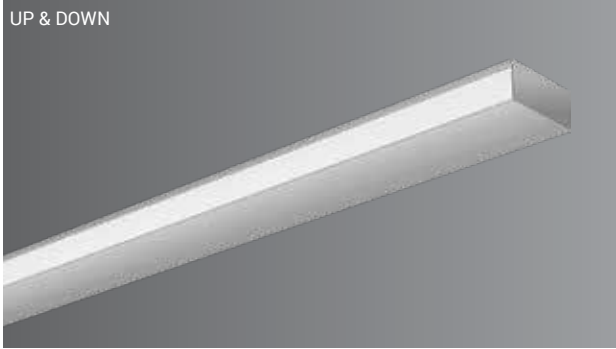

2861

4ft PC Opal Diffuser-60W



BESPOKE - DESIGN INSPIRATION




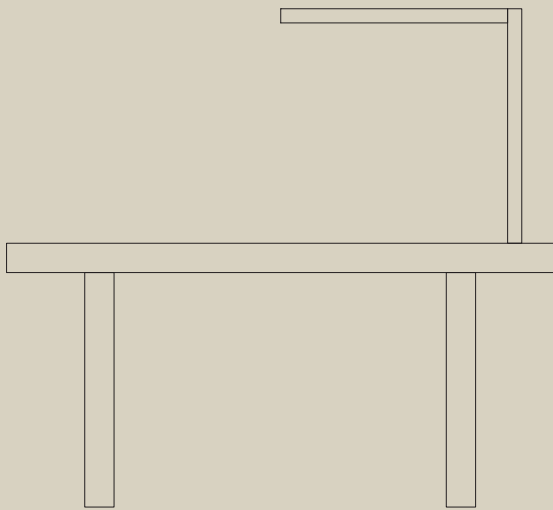


Table Top Installation

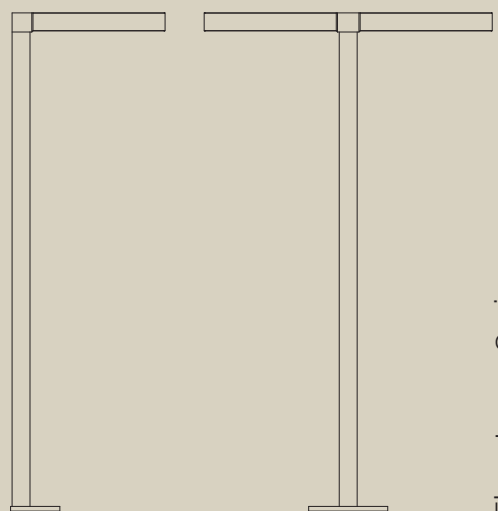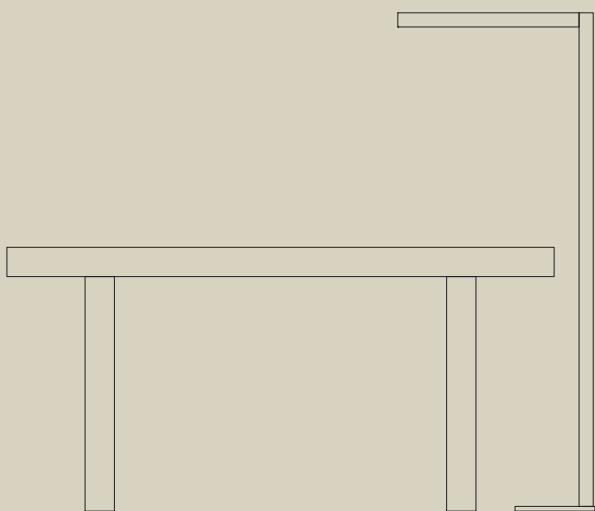


Floor Lamp Series


For Latest Products Visit @ www.klite.in

INSPIRATION






Architectural Linear
IP67 Profiles




Underwater Luminaires




Architectural
Lighting Poles



Nebula
Landscape Luminaires




Architectural Lighting
Indoor Series 2021



Landscape Luminaires




Aluminium Series



Path Finder
Professional Series




Cast Iron Series



Ceiling Mounted
Luminaires




Bollard Series




Wall Luminaires
Professional Series



Garden Lighting Poles



Linear In-Ground Series



Area Lighting Poles

For updated product listing visit us @ www.klite.in

General Note :

The present catalogue can not be reproduced even partially, unless agreed otherwise in writing.

All rights reserved.

It is our constant endeavour to update the luminaires performance hence the description, dimensions & features of our product can change. For latest technical information, IES files and product updates please refer to the website at www.klite.in

Concept, Drawings, Design & Development are joint work of our company's designers.

Subject to change in technology and design & mild colour deviations.



K-LITE

K-LITE INDUSTRIES India's Lighting Company

D-10, Ambattur Industrial Estate,
Chennai - 600 058.

T: 26257710, 48581950.

F: 26257866

M: 95000 79797, 95000 85511

E: info@klite.in

W: www.klite.in

Unit II

23B, SIDCO Industrial Estate,
Chennai - 600 098.

Unit IV

Plot No.E29, E30, Industrial Area,
Phase-II, Mandideep Tehsil,
Goharganj District-462046.
Raisen (MP).

London

Ridgeland House, 1st Floor,
15 Carfax, Horsham,
West Sussex, RH12 1DY.

Unit III

179 & 180, SIDCO Industrial
Estate, Chennai - 600 098.

Unit V

Experience Centre
G8, Ambattur Industrial Estate,
Chennai - 600 058.

Experience Centre - Delhi NCR

L-14/10, DLF City,
Phase - II, Gurgaon - 122002,
Haryana.